HAZEL GREEN REGIONAL ATHLETIC COMPLEX

PHASE 1 — REMODEL OF EXISTING WRESTLING ROOM

Requested by: Shane Brazelton — 256-508-4608 / brazeltonshane@gmail.com

Location: Hazel Green, Madison County, Alabama
Rooms: existing wrestling room + adjacent walk-through room
For review by: Dr. Headen (principal) + district facilities

WHAT THIS PROJECT DOES — 3 WORK ITEMS, IN PRIORITY ORDER

W2 — RESTORE WATER / PLUMBING REPAIR

PRIORITY 1

No running water to the area. All fixtures out of service. Cause unknown.

Restore running water to the area and repair the plumbing so the fixtures work again.

Why: Athletes have no working restroom or handwashing during practice; hygiene matters in a contact sport.

Where: Support wing east of the wrestling room, along the open hallway.

Problem spots: Entire support wing. Showers were already broken before the water loss.

Existing fixtures: 2 showers, 1 private toilet, 2 toilets, 1 urinal, sinks (count TBD), water fountain/sink — all out of service, no running water.

Water / drain lines: TBD / TBD

WHO DESIGNS IT

BY LICENSED PLUMBER / ENGINEER OF RECORD

This package gives: scope narrative + fixture list only (no plumbing design).

Plumbing code: 2021 IPC (Alabama) — 2021 ASSUMED, verify with AHJ.

Edition still open: county lists 2018 codes; State Fire Marshal uses 2021.

W3 — RESTROOM SPLIT

PRIORITY 2

Why: The route to the training room is an open walk-through room.

Result: 1 male + 1 female athlete restroom (single-user, one per sex).

Accessibility: full 2010 ADA Standards, BOTH rooms.

Where / room sizes: Support wing — waiting on support wing measurements.

KEY 2010 ADA NUMBERS FOR EACH RESTROOM

Item	Requirement	2010 ADA §
Turning space	60 in circle (or T-shape)	304.3
Clear space at toilet	60 in wide × 56 in deep, min	604.3.1
Toilet centerline to side wall	16–18 in	604.2
Toilet seat height	17–19 in	604.4
Side grab bar	42 in long min; starts ≤ 12 in from rear wall	604.5.1
Rear grab bar	36 in long min	604.5.2
Grab bar height (top)	33–36 in	609.4
Sink clear floor space	30 × 48 in, forward	305.3, 606.2
Sink rim height	34 in max	606.3
Mirror bottom edge	40 in max above floor	603.3
Door clear width	32 in min	404.2.3
Door handle height	34–48 in	404.2.7
Door swing	not over toilet/sink clear space unless a 30 × 48 in space is beyond the swing	603.2.3
Room sign	tactile, 48–60 in high, latch side	703.4

Planning numbers only. The final restroom layout comes after the rooms are measured.

W1 — WALL PADDING

PRIORITY 3 — CAN RUN IN PARALLEL

Does not depend on water.

Proper training wall pads on the wrestling room walls. Finish work, not new construction.

Why: Wrestlers can get hurt when they are thrown or fall into bare, unpadded walls during practice. Proper wall pads lower that risk.

Walls to pad: TBD

Pad height: 6 ft

Pad thickness: TBD

Estimate: ~188 LF of padded wall after 4 doors (~94 panels at 2 ft x 6 ft); 6'-0" pads under a 10'-0" ceiling. Estimate assumes all 4 walls.

Who buys or donates: TBD (school purchase, donation, or fundraiser)

Door hardware: Recess from wall surface where possible. Walls flat, no bump-outs.

FIRE SAFETY — BEFORE BUYING PADS

Wall pads must have an NFPA 286 assembly test report — not a foam-only rating. Ask the vendor before purchase.

Code basis: 2021 IBC 806.2 and 803.4 → 2603.9 (Alabama Building Code) — 2021 ASSUMED, verify with AHJ.

NOT INCLUDED

- × The Phase 2 new building complex
- × Stadium seats
- × Any new structure

Phase 1 is a remodel of existing rooms only.

WHO APPROVES

1. Principal (Dr. Headen)
2. District facilities (MCSS Operations & Facilities)
3. Others as the district requires


District guidelines send campus building improvements to the Board of Education. State building review (Alabama DCM) may also apply.

Scope confirmation expected: ~end of October 2026 (principal + facilities)


WHAT WE'RE ASKING THE SCHOOL FOR

1. Permission to measure and photograph the support wing and walk-through room
2. A district facilities contact
3. How approval works for this kind of work
4. A plumber visit to diagnose why there is no water (shutoff, supply line, or other)
5. Copies of the photos Dr. Headen took

PHOTOS




Wrestling room



Walk-through room

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Hazel Green, Madison County, Alabama	**PHASE 1 REMODEL**	**SCOPE SHEET PHASE 1 — REMODEL OF EXISTING WRESTLING ROOM**	**NTS**	**October 2026**	**E**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P1-G-001**

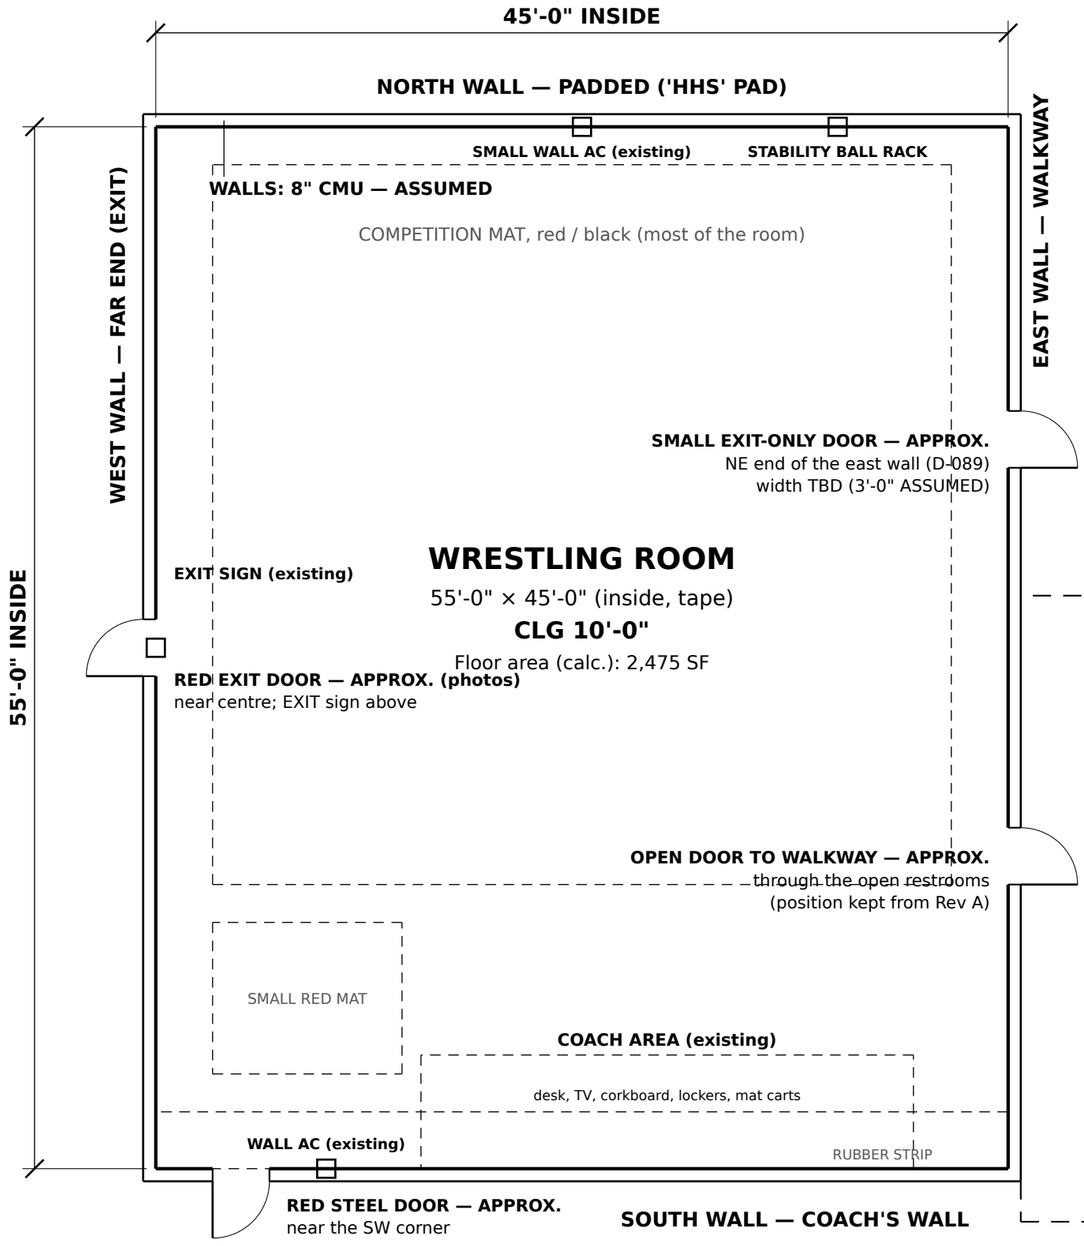

EXISTING CONDITIONS PLAN

WRESTLING ROOM — WALLS + EXISTING CONDITIONS

Scale 1/8" = 1'-0" (11x17 printed at 100%)

NOTES

1. Room size unchanged: 55'-0" N-S x 45'-0" E-W inside (Shane tape 2026-10-03); CLG 10'-0".
2. Wall names, doors, AC units, exit sign, coach area and mats: from Shane's photos 2026-10-09 (D-088). Positions APPROX, NOT measured.
3. Doors 3'-0" x 7'-0" HM, swing out: ASSUMED STANDARD, VERIFY (as Rev A).
4. 4 doors: S red steel door, W exit, E open door to the walkway, NE small EXIT-ONLY door (D-089, Shane 4:49 PM CT).
5. Existing wall pads: west wall (both sides of the exit) and north wall. Condition / height TBD.
6. Walls 8" CMU ASSUMED. Support wing not yet measured (dashed, schematic).

LEGEND

- CMU wall, 8" ASSUMED (inner line = tape-measured inside face)
- Door, 3'-0" leaf + swing — ASSUMED STANDARD, VERIFY; location APPROX.
- Existing condition (mat, zone / device), APPROX from photos 2026-10-09
- Not yet measured (schematic only)

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Hazel Green, Madison County, Alabama**	**PHASE 1 REMODEL**	**EXISTING CONDITIONS PLAN** **WRESTLING ROOM — WALLS + EXISTING CONDITIONS**	**1/8" = 1'-0"**	**October 2026**	**C**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P1-A-101**

PRIORITY 1 — RESTORE WATER · NO RUNNING WATER · ALL FIXTURES OUT OF SERVICE

EXISTING CONDITION (SOURCED)

Status: No running water to the area. All fixtures out of service. Cause unknown.

Detail: Showers, toilets, and sinks are all non-functional, not just leaking.

Where: Support wing east of the wrestling room, along the open hallway.

Problem spots: Entire support wing; showers were already broken before the water loss.

Cause: TBD — plumber to diagnose

Water lines: TBD

Drain lines: TBD

Before 2026-10-03: Plumbing already failing in the existing building.

SCOPE OF WORK (NARRATIVE — NOT A DESIGN)

Work item: W2 — Restore water / plumbing repair · PRIORITY 1

KEYSTONE role: scope narrative + fixture list only (no plumbing design)

Why: Athletes have no working restroom or handwashing during practice; hygiene matters in a contact sport.

Plumber / EOR to:

1. Diagnose the cause of the water loss (shutoff, supply line, or other) — plumber to determine
2. Restore running water to the support wing / wrestling-room area
3. Repair or replace fixtures and piping as the licensed plumber directs after diagnosis
4. Do NOT size pipe, design layouts, or seal plumbing drawings on this sheet — BY LICENSED PLUMBER / ENGINEER OF RECORD

BY LICENSED PLUMBER / ENGINEER OF RECORD

Plumbing work on this project is BY LICENSED PLUMBER / ENGINEER OF RECORD. Alabama requires a state plumbing certificate to engage in plumbing work except listed exemptions (owner; owner's regular maintenance employee). How those exemptions apply on public school property was not found — ask the district / PGFB / DCM inspector. KEYSTONE produces a scope narrative and fixture list only; no pipe sizing, no plumbing design.

Cite: R-004.3 (Ala. Code §§34-37-6(a), 34-37-15; PGFB FAQ); phase1.yaml standards.approvals_refs.plumbing_license; prompt §2. District confirmation still needed.

FIXTURE INVENTORY (ALL OUT OF SERVICE)

#	FIXTURE	QTY	STATUS	NOTE
1	**Shower**	2	out of service	broken before the water loss
2	**Private toilet**	1	out of service	—
3	**Toilet**	2	out of service	—
4	**Urinal**	1	out of service	—
5	**Sink**	TBD	out of service	count TBD
6	**Water fountain / sink**	1	out of service	marked near urinal / hallway on aerial sketch

Source: Shane, firsthand 2026-10-03. Sink count and line routing still TBD. No pipe sizes on this sheet.

OPEN ITEMS / ASKS

1. Licensed plumber visit to diagnose why there is no water
2. Photos of shutoff valves, supply / drain lines, and each fixture
3. Confirm sink count (still TBD)
4. Confirm water-line and drain-line routing (still TBD)
5. Copies of the photos Dr. Headen already took
6. District confirmation of approval path for this repair work (D-004)

CROSS-REFERENCES (FROZEN — DO NOT REGENERATE)

- P1-G-001 Rev D (principal scope sheet) — Phase1_Package_for_Dr_Headen
- P1-A-101 Rev A (existing conditions — wrestling room outline; support wing not yet measured)

Package: Phase1_Package_for_Dr_Headen. This sheet adds W2 detail only.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Hazel Green, Madison County, Alabama**	**PHASE 1 REMODEL**	**PLUMBING / WATER RESTORE SCOPE** **PHASE 1 — WORK ITEM W2 (PRIORITY 1) — SCOPE NARRATIVE ONLY**	**NTS**	**October 2026**	**A**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P1-P-001**

PHASE 1 WRESTLING ROOM — MATERIALS COST (mats, wall pads, LED)

Supersedes Rev A (pre-scope change, included install)

Room cleared: 100 % of the 2,475 SF floor (55' x 45') gets mat. Pads 6 ft high on the whole perimeter less 4 doors: 200 - 4 x 3 ft = 188 LF = 94 panels.

Materials only: the team clears, relocates and installs ($0, by owner). Water / restrooms out of scope. List prices 2026-10-09; not a quote. Tax, pad freight, custom sizes extra.

ITEM	QTY	LOW	MID	HIGH
Wrestling mat, wall to wall	2,475 SF	$10,519 $4.25/SF	$16,328 $6.60/SF	$21,046 $8.50/SF
Mat tape (3 in x 60 yd rolls)	3 rolls	$83 $27.52/roll	$135 $44.99/roll	$184 $61.49/roll
Mat freight	1 lot	$240	$1,220	$1,300
Wall pads 2 x 6 ft, NFPA 286 / Class A	94 panels (188 LF)	$15,580 $165.75/panel	$26,726 $284.32/panel	$33,276 $354.00/panel
Pad mounting hardware (Z-clip kits)	94 panels	$2,098 $22.32/panel	$2,348 $24.98/panel	$2,350 $25.00/panel
LED 4 ft wrap fixtures (count ASSUMED)	10-12 fixtures	$672 10 x $67.20	$837 11 x $76.13	$2,016 12 x $168.00
Subtotal, materials		**$29,192**	**$47,595**	**$60,172**
Contingency 10 %		$2,919	$4,759	$6,017
TOTAL, materials		**$32,111**	**$52,354**	**$66,190**

BY OWNER / NOTES — NOT IN THE TOTAL

OWNER Clear the room; relocate desk, TV, lockers, mat carts: $0 (by owner (team))

OWNER Install mats, wall pads and LED fixtures: $0 (by owner (team); electrical license exemption for owner's employees per phase1.yaml approvals_refs, confirm)

NFPA NFPA 286 assembly test report for the pads: in pad price (ask the vendor before purchase)

FRT Wall pad freight: quote (truck freight, not listed)

USED / TRADE-IN

Resilite used Classic 625, 29 x 52'7" (as-is): $5,760

Resilite reconditioning program (clean, repair, recoat; 1-yr warranty): call for price

Used 8 x 40 ft mat, Craigslist Tulsa (example): $600

PROCUREMENT: School-board purchases at or over $40,000 go to competitive bid (Ala. Code 16-13B-1, per Examiners Feb 2025; MEDIUM; phase1.yaml approvals_refs). Check each total against it with the district.

SOURCES (list prices, 2026-10-09)

1. AK Athletic standard roll-up 42 x 42 x 1-3/8 in: $7,497.00 / 1,764 SF
   https://akathletics.com/products/standard-roll-up-wrestling-mat-42-x-42
2. Zebra Home Roll-Out 5 x 10 ft (home use): $215.00 / 50 SF
   https://www.zebraathletics.com/Zebra-Home-Roll-Out-Mats
3. Great Call RapidRoll 42 x 42 (NCAA): $8,999.99 / 1,764 SF
   https://greatcallathletics.com/products/42-x-42-official-ncaa-wrestling-mat-collegiate-tournament-approved
4. Resilite FLEX3 12 x 12 (home use, 1-5/8 in): $950.00 / 144 SF
   https://www.resilite.com/collections/home-use-flex3-wrestling-mats
5. Dollamur FLEXI-Roll 42 x 42 x 1-5/8 in: $13,499.99 / 1,764 SF
   https://www.bsnsports.com/p/dollamur-wrestling-mat-42-x-42-x-1-58/
6. Dollamur FLEXI-Roll 42 x 42 x 2 in: $14,999.99 / 1,764 SF
   https://www.bsnsports.com/p/dollamur-wrestling-mat-42-x-42-x-2/
7. Sanderson / Cael Sanderson: no published price found 2026-10-09; quote required
8. Mansion Athletics 2x6 Class A (NFPA 286 tested as a unit): $165.75 / panel
   https://mansionathletics.com/2x6-wall-padding-class-1084318-tennis-court-equipment-backstop-pads.html
9. AK Athletics FlameSafe Class A 2x6 (NFPA 286): $219.00 / panel
   https://akathletics.com/products/flame-safe-class-a-fire-rated-wood-backed-gym-wall-padding-panels-2-x-6
10. Greatmats Safety Fire Rated Impact 2x6, nailing lip (NFPA 286 foam): $284.32 / panel
    https://www.greatmats.com/wall-pads/safety-fire-impact-wall-pads-2x6-lipb.php
11. Jaypro WallGuard Fire/Impact 2x6 Z-clip (MSRP): $354.00 / panel
    https://shop.jayprosports.com/Wall-Padding--WallGuard-FireImpact-Rated-2-ft-x-6-ft-Z-Clip-Top-Bottom-_p_4855.html
12. GLT LW4 4 ft LED wrap, 4,000 lm, 34 W: $67.20 each
    https://www.beeslighting.com/products/glt-lw4-40l-40k-d10-4ft-led-wrap-light-34-watts-4400-lumens-4000k-120-277v
13. Lithonia FML4W 4 ft LED wrap, 4,000-6,000 lm: $76.13 each
    https://www.homedepot.com/p/Lithonia-Lighting-Contractor-Select-4-ft-40-Watt-4000-5000-6000-Lumens-Integrated-LED-Dimmable-White-Wraparound-Light-Fixture-4000K-FML4W-48-ALO6-SEF-840-MVOLT/313845712
14. Auvolar A-WR4FT 4 ft wrap with 90-min emergency battery: $168.00 each
    https://www.auvolar.com/p/led-wraparound-a-wr4ft
15. Z-clip hardware: Z-clip kits for 3 pads: Gared $66.97 / $74.95, Century $75 (per panel = kit / 3)
    https://www.kitsuperstore.com/wall-stage-padding/3991-gared-z-clip-attachment-kit-3-pads-4196.html
16. Mat freight: AK Ultra Shock comparison table 240/1,220; Great Call flat $1,300
    https://www.akathleticshop.com/ak-athletic-equipment-ultra-shock-mats-42-x-42-ultra-shock-roll-up-wrestling-mat/
17. Mat tape: JVCC WMT-7 3 in x 60 yd listings
    https://www.findtape.com/JVCC-WMT-7-Wrestling-Mat-Tape/p747/

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Hazel Green, Madison County, Alabama**	**PHASE 1 REMODEL**	**COST SHEET** **MATS, PADS, LED**	**NTS**	**October 2026**	**B**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P1-G-002**