
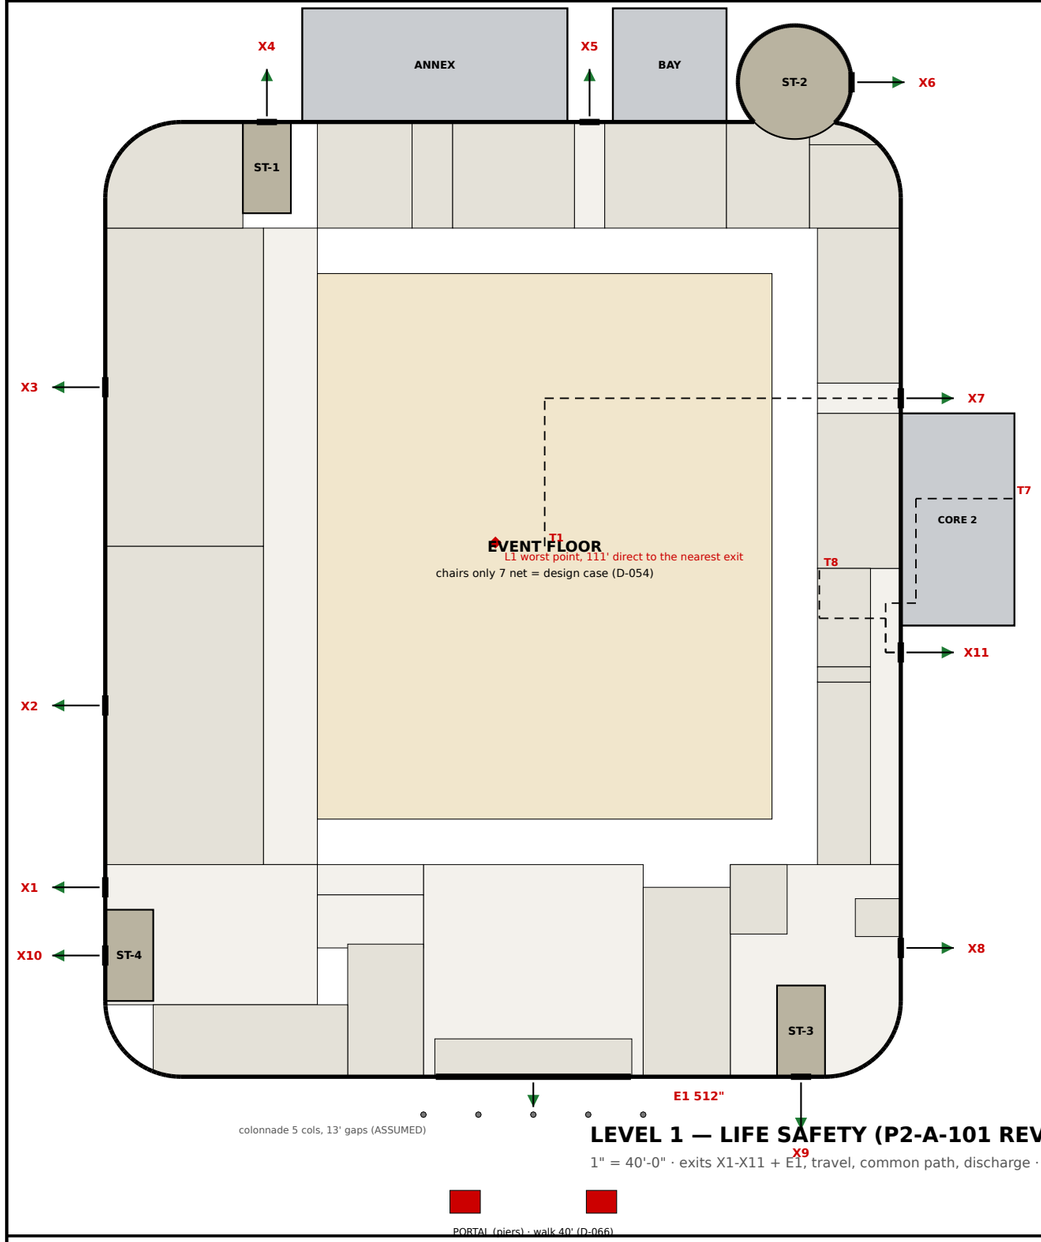


LEVEL 1 — LIFE SAFETY (P2-A-101 REV N)

1" = 40'-0" · exits X1-X11 + E1, travel, common path, discharge · no bus loop (D-087)

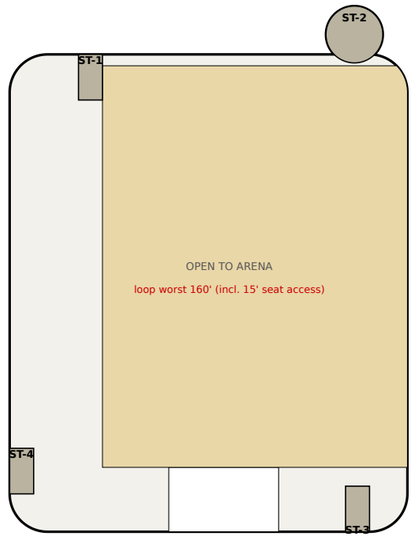

LEVEL 2 — STAIRS + LOOP (P2-A-102 REV I) · 1" = 80'

N

EXITS (each tested on the Rev N outline)

EXIT	POSITION	SERVES	OK
X1	W (0.0, 50.0)	team assembly (D-078)	PASS
X2	W (0.0, 98.0)	girls locker	PASS
X3	W (0.0, 182.0)	boys locker	PASS
X4	N (42.7, 252.0)	ST-1 discharge	PASS
X5	N (127.8, 252.0)	EXIT (N), bay clear	PASS
X6	drum E face (197.0, 262.5)	ST-2 30 ft drum, east face; clear of bay	PASS
X7	E (210.0, 179.1)	EXIT (E) on the wall, north of the bump-	PASS
X8	E (210.0, 34.0)	east concourse	PASS
X9	S (183.7, 0.0)	ST-3 discharge (D-078)	PASS
X10	W (0.0, 32.0)	ST-4 discharge (D-078)	PASS
X11	E (210.0, 112.0)	public corridor (E), south of the bump-o	PASS
E1	S bank (113.0, 0.0)	8-pair bank x 87.25-138.75	PASS

CAPACITY (doors 0.15 in/occ., 64 in per pair; stairs 0.2)

FLOOR CASE	BLDG OCC.	NEED in	E1 ½	PROVIDED
Sports (50 gross)	3,257	488.5	244.3	1,216 / E1 512
Tables + chairs (15 net)	4,023	603.4	301.7	1,216 / E1 512
Chairs only (7 net) DESIGN	**5,274**	**791.1**	**395.6**	**1,216 / E1 512**
Standing (5 net) margin	6,212	931.8	465.9	1,216 / E1 512

L2 worst 1,460 x 0.2 = 292.0 in vs 4 x 76 = 304 in; lose one stair 228 in. PASS.

TRAVEL · COMMON PATH · SEPARATION (IBC 2021)

- L1 travel (T1017.2, 250 ft): worst point 111 ft direct to the nearest exit (routed path TBD). X7 path T1 133 ft. PASS.
- L2 travel: loop worst 160 ft. PASS.
- Common path (75 ft): women (2) 61 ft, men (2) 30 ft. Dead end 5.2 ft (20). PASS.
- Stair separation (1007.1.1, 1/3 x 328 = 109 ft): shortest 141 ft (ST-1 to ST-2 drum door). PASS.

DISCHARGE (no bus loop, D-087)

- Every exit discharges straight to open grade; no bus loop or drive crosses a discharge. Route to a public way: parcel TBD (D-006).
- E1: through the colonnade (4 gaps x 13 ft = 624 in clear vs 512 in bank) and around / through the portal on the 40 ft walk (D-066).
- X5 in the 12 ft lane between annex and bay; X6 off the drum east face (3 ft drum-to-bay gap is west of it); X7 / X11 to grade east (D-084).

FINDINGS (not redesigned)

- F1 A colonnade column sits on the E1 / portal axis (x 113), 10 ft in front of the centre door pairs. Width still passes. Options: (a) keep; (b) even column count so the axis is open; (c) wider centre bay. Shane / architect.
- F2 X6 opens toward the bay corner (drum-to-bay 3 ft): the landing outside X6 faces east, clear; confirm grading / walk at the NE corner (D-006).

Sources: p2_egress_rev_n.py (P2-G-002 Rev F); p2_plan_rev_n_geom.py; phase2_facade_srm.yaml; phase2_site.yaml portal; D-054, D-066, D-072, D-078, D-082..D-087.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**LIFE SAFETY PLAN LEVELS 1 + 2 · SCHEMATIC**	**1" = 40'-0"**	**October 2026**	**E**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-111**