



1 SECTION A-A (NORTH-SOUTH) — looking west

1" = 40'-0" · x = 100 (see key plan)

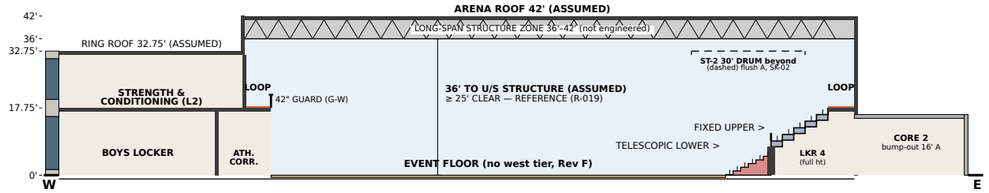


2 SECTION B-B (EAST-WEST) — looking north

1" = 40'-0" · y = 150 (see key plan)

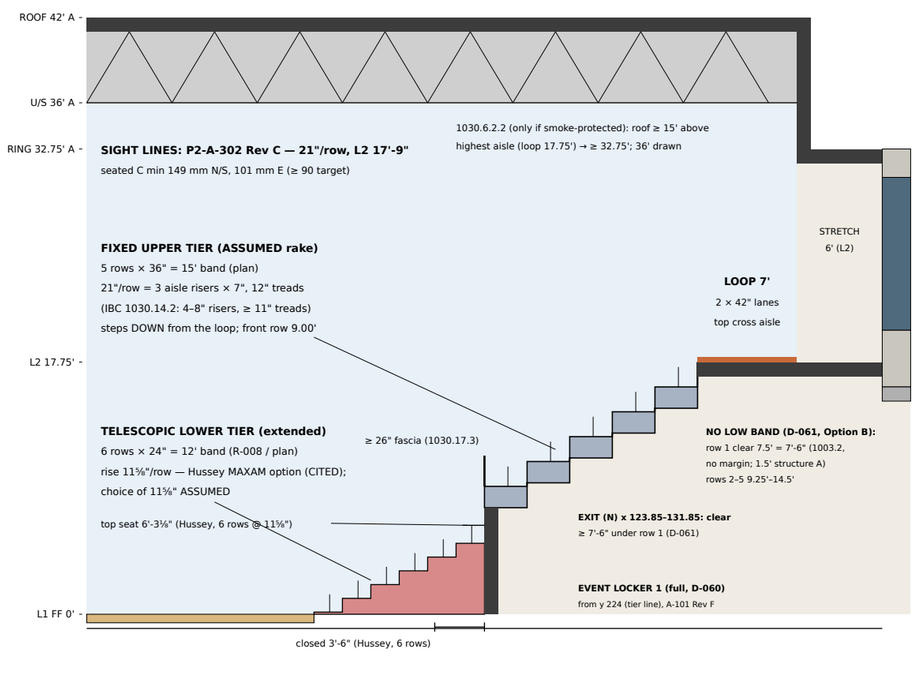


3 NORTH BOWL EDGE (ENLARGED PART OF A-A)

3/32" = 1'-0" · y 196–252 at x = 100

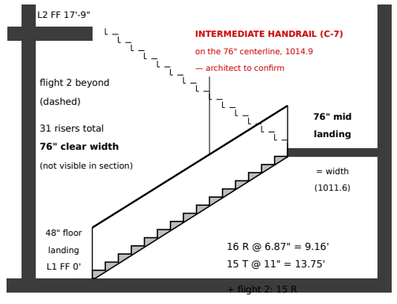

4 TYPICAL EXIT STAIR — 76" CLEAR, 31 R

3/32" = 1'-0" · 76" mid landing · 12.67' × 24.08' plan (D-061)

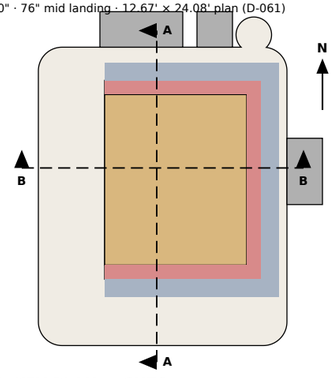

5 KEY PLAN — CUTS

1" = 128' · north up

CUT: slab / wall / roof (graphic)
TELESCOPIC LOWER TIER
LOBBY
SRM: BOARD-FORMED CONCRETE BAND (A)
ARENA VOLUME
FIXED UPPER TIER
ROOMS / SUPPORT
SRM: GLASS BAND (skin strip graphic)
EVENT FLOOR
LOOP (L2)
LONG-SPAN STRUCTURE ZONE
IMP POP-OUT (A)

HEIGHTS USED (ft above L1 FF 0'-0")

- L2 FF 17'-9" (D-061). Ring roof 32.75', arena U/S 36', roof 42' — ASSUMED. Bay / annex / bump-out 16' A (SK-01). Drum flush A (SK-02).
- Arena clear ≥ 25' — REFERENCE (NFHS court specs via Draper; LA RAP gym standard; R-019), not a code minimum (C-5). 36' drawn = 11' over it.
- Slabs, walls, roof graphic only. Upper-tier deck structure 1.5' under each tread — ASSUMED.

SEATING (P2-A-101 Rev F)

- Lower: telescopic, 6 rows × 24", 11⅝" rise (Hussey MAXAM option, CITED; choice ASSUMED); east front 16' from the nearest mat (D-053); building 210' wide.
- Upper: fixed, 15' band, 5 rows × 36", 21"/row (D-061) = 3 aisle risers × 7", 12" treads (1030.14.2: 4–8", ≥ 11"); steps DOWN from the loop (D-049) to a 9.0' front row.
- UNDER THE UPPER TIER: row 1 clear 7.5' = 7'-6" (1003.2 minimum, no margin), rows 2–5 9.25'–14.5'. No low band: EXIT (N), EXIT (E), SE concourse, lobby / portal / athlete route are clear. Event lockers run to the tier line (3,600 SF, D-060).
- SIGHT LINES: P2-A-302 Rev C (21"/row, L2 17'-9"): seated C min 149 mm N/S, 101 mm E; standing 127 / 72 mm (lower tier governs).

GUARDS

- Loop open edges G-W (x = 56) and G-S (y = 34): 42" (IBC 2021 1015.2 / 1015.3). Upper-tier front fascia ≥ 26" (1030.17.3), 36" at aisle feet (1030.17.4).

STAIRS (ST-1..ST-4)

- 76" clear (D-052). 31 R @ 6.87" (213" ÷ 31, ≤ 7", 1011.5.2), flights 16 + 15, 15 treads × 11" = 13.75'; 76" intermediate landing = width (1011.6, D-051); 48" floor landings. Per stair 12.67' × 24.08' = 305.1 SF per level (Rev C 270.2).
- Intermediate handrail on the centerline of each 76" stair so all width is within 30" of a rail (IBC 2021 1014.9; D-052 'with intermediate handrails') — shown in detail 4; architect to confirm (C-7).

ROOF HEIGHT (1030.6.2.2, if smoke-protected)

- Lowest roof deck ≥ 15' above the highest aisle: loop 17.75' → ≥ 32.75'. Arena U/S structure 36' drawn = 3.25' margin (deck higher). Ring roof 32.75' is over the perimeter rooms, not the seating.

ELEVATOR

- EL-1 travel 17'-9" (was 15'); hoistway / pit / overrun by the elevator supplier (not drawn).

CURRENT DESIGN (REV E)

- Outline = P2-A-101 Rev N / A-102 Rev I: R 20' corners, 30' ST-2 drum (beyond on B-B), annex on A-A, core-2 bump-out on B-B (D-072 / D-084). No bus loop (D-087).
- SRM skin (A-201 Rev L, D-074): cut exterior walls = concrete slab-edge bands + glass bands; colonnade + 12' canopy at the lobby front on A-A. Levels, spacing ASSUMED. East wall flush with the arena: concrete, no glass (open).
- CUTS: A-A x = 100 looking west; B-B y = 150 looking north; 1" = 40'. Tiers as Rev D (unchanged). 'A' = ASSUMED.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**BUILDING SECTIONS SCHEMATIC · COLOR**	**AS NOTED**	**October 2026**	**E**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-301**