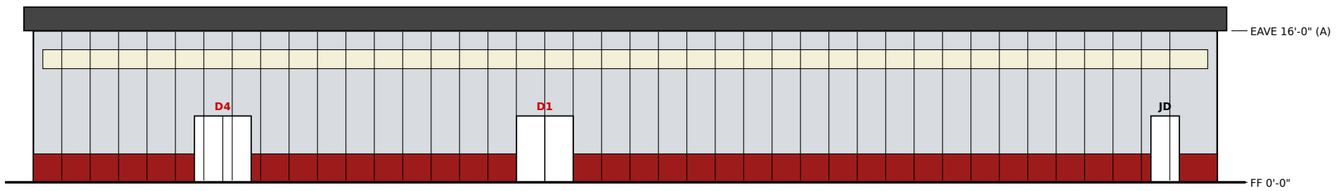

SOUTH ELEVATION (MAIN ENTRY) — 1/16" = 1'-0"

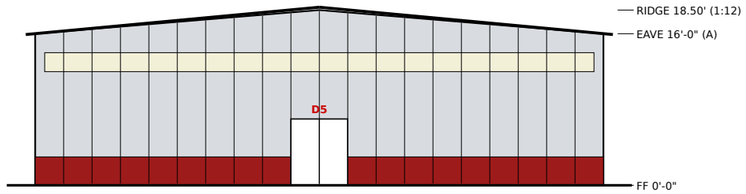

EAST ELEVATION (LOCKER END) — 1/16" = 1'-0"

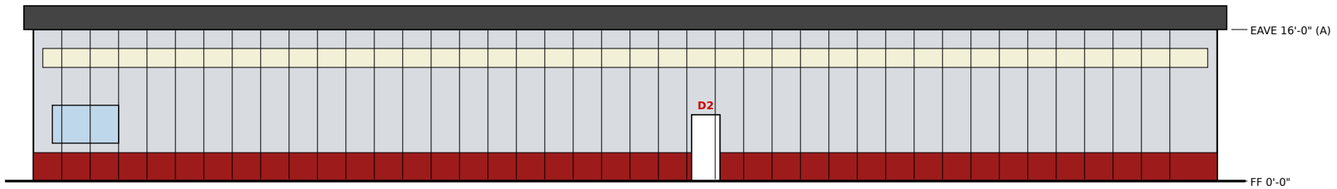

NORTH ELEVATION — 1/16" = 1'-0"

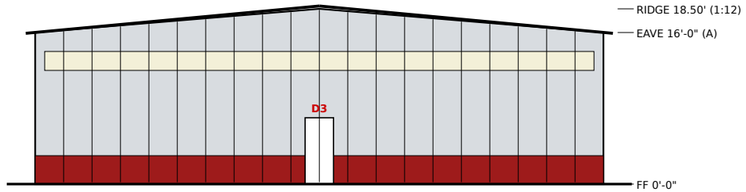

WEST ELEVATION (MAT ROOM END) — 1/16" = 1'-0"

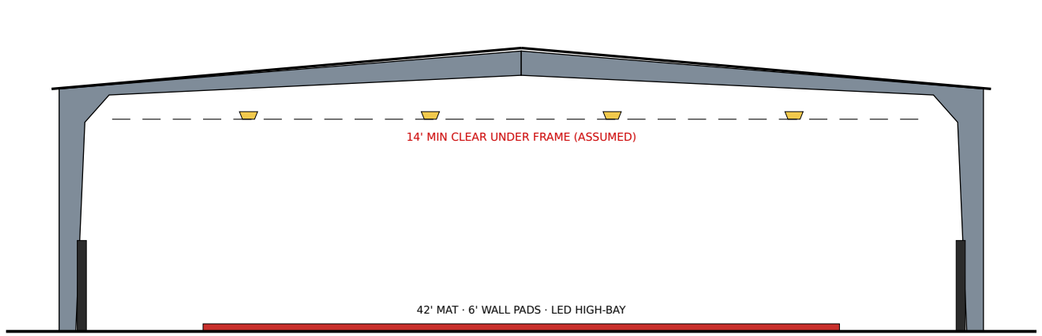

SECTION A-A THROUGH THE MAT ROOM (looking west) — 1/10" = 1'-0"

NOTES

- Pre-engineered clear-span rigid frame, 1:12 gable (ASSUMED). Eave 16' (ASSUMED), ridge 18.50' computed from the pitch. Final frame, eave and clear height by Summertown Metals' engineer.
- Walls / roof: insulated metal panels (IMP or metal + liner, Summertown kit), R-values per the Alabama Energy Code (IECC 2015 / 90.1-2013) — TBD by supplier (R-028.4).
- Daylight: translucent wall-panel band 12'-14' (ASSUMED) on all faces; skylights only where code / supplier allow (D-093 direction). LED high-bay in the mat room; LED elsewhere.
- Color: crimson wainscot 0-3' (school color, ASSUMED); light gray panels; dark roof (ASSUMED). Gutters / downspouts to rain capture if the campus wants it (unsized).
- Doors: hollow-metal exit doors with panic hardware on D1-D5 (Group A, IBC 1010.2.9); D5 = east corridor pair; JD = JAN. / mech service door (not an exit). Red tags = exits. D-095 Rev B: 60' x 125', 5 bays (ASSUMED).
- Foundation: slab-on-grade with column piers / anchor bolts per the PEMB reactions — geotech + structural TBD. No site plan yet (location on campus TBD).

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Hazel Green HS · Phase 1 alternate: new metal training building**	**PHASE 1 ALTERNATE**	**ELEVATIONS + SECTION METAL BUILDING (ALT.)**	**1/16" = 1'-0"**	**October 2026**	**B**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P1-A-301**