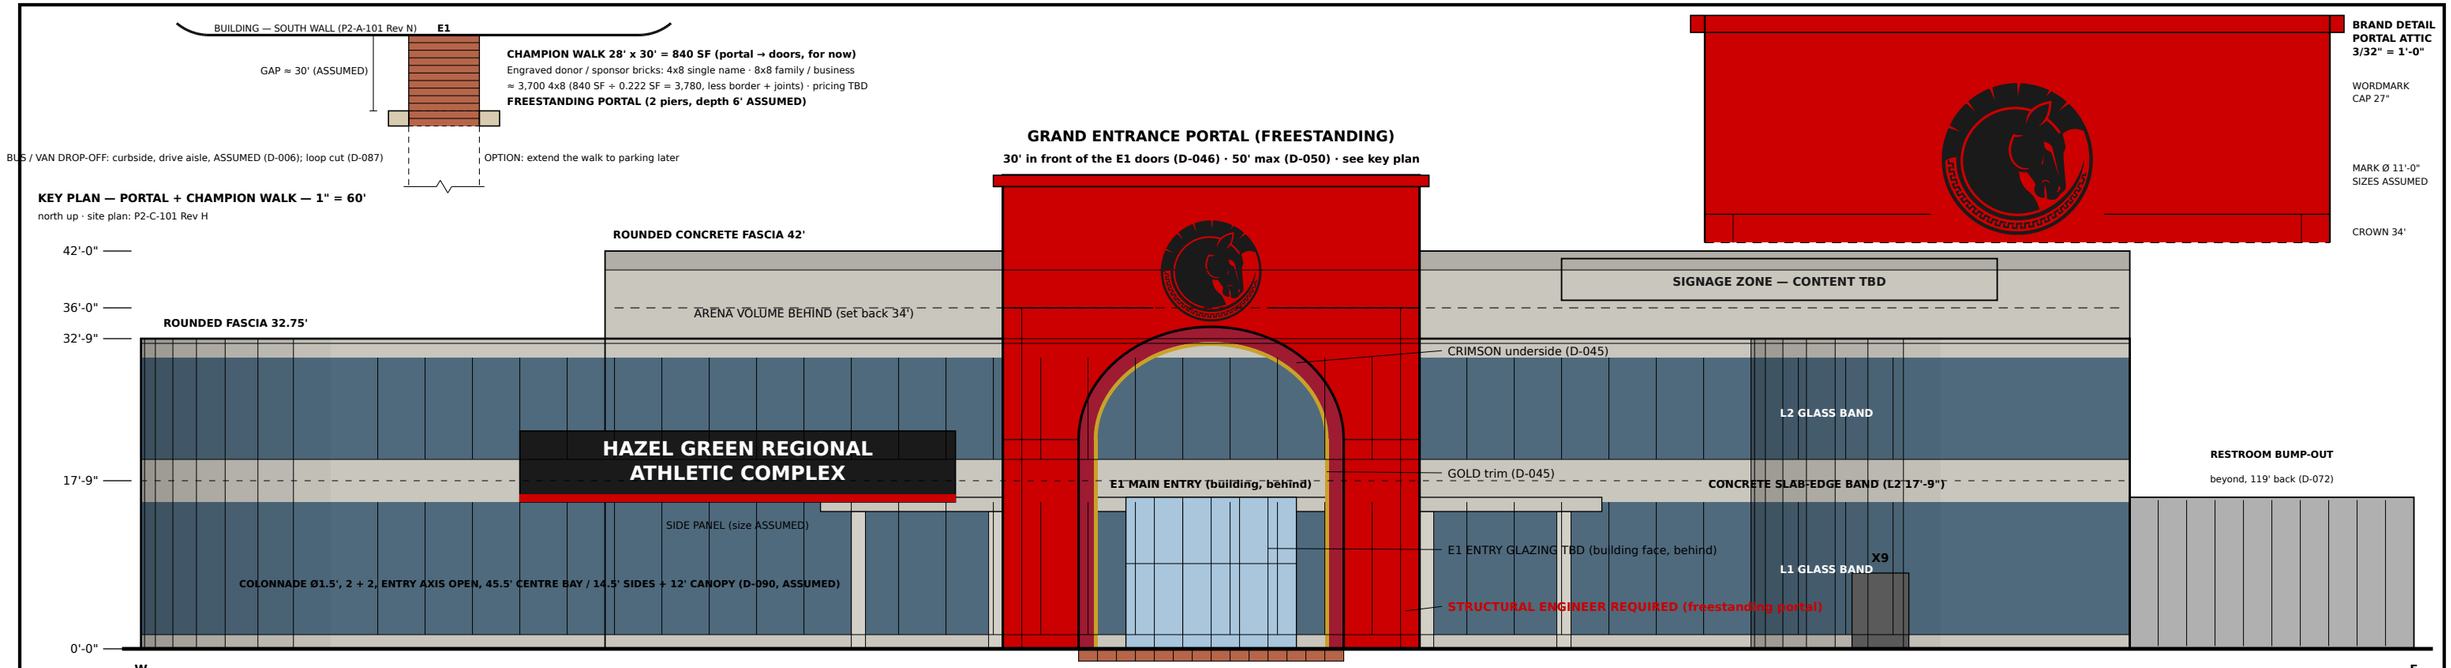


NOTES

- HEIGHTS: L2 FF 17'-9" (D-061 DECIDED), ring roof 32.75' (L2 + 15') ASSUMED. Arena clear ≥ 25' REFERENCE (NFHS via Draper, LA RAP; R-019). U/S structure 36', roof 42' ASSUMED. Upper tier steps DOWN from the loop: 21" risers, front row 9.0' (7'-6" clear, D-061); highest aisle = loop 17.75' (1030.6.2.2 if smoke-protected: ≥ 32.75'; 36' U/S drawn).
- PORTAL: FREESTANDING CRIMSON (#CC0000) arch (Shane 2026-10-11; was limestone) 30' in front of the E1 doors over Champion Walk (D-043, D-046); 50' max (D-050): crown 34', springline 22.1', depth 6' ASSUMED; underside crimson + gold trim (D-045). STRUCTURAL ENGINEER REQUIRED.
- BRAND: official mark Ø 11' (D-047) + wordmark on the portal, ASSUMED sizes. Trademark search OPEN (D-042).
- CHAMPION WALK: 28' x 30' brick (D-046), plan position kept; bricks / pricing OPEN (D-044). Bus loop cut (D-087).
- DOORS: symbols (6' x 8' ASSUMED) from P2-A-101 Rev N; X# EXIT ONLY (D-033); X6 on the drum, X7 on the wall, X11 off the corridor, S1 on the annex.
- OUTLINE = A-101 Rev N (GSF 86,964 unchanged). SRM HQ look (D-074): concrete slab-edge bands + glass per level, curved R 20' corners, concrete drum with glass slots, colonnade (D-090: 2 + 2 columns, entry axis open, 45.5' centre bay) + canopy, IMP pop-outs. Band levels, spacing, canopy ASSUMED (phase2_facade_srm.yaml).
- NOT SHOWN: rooftop units, cistern (D-092), skylights + LED (D-093), grading. Solar CUT (D-091).
- OPEN: ETFE roof. Bay 16' (SK-01) and drum flush (SK-02) ASSUMED, pending.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**EXTERIOR ELEVATIONS SCHEMATIC · COLOR**	**AS NOTED**	**October 2026**	**N**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-201**