

V1 AERIAL FROM SOUTHWEST

axonometric · not to scale

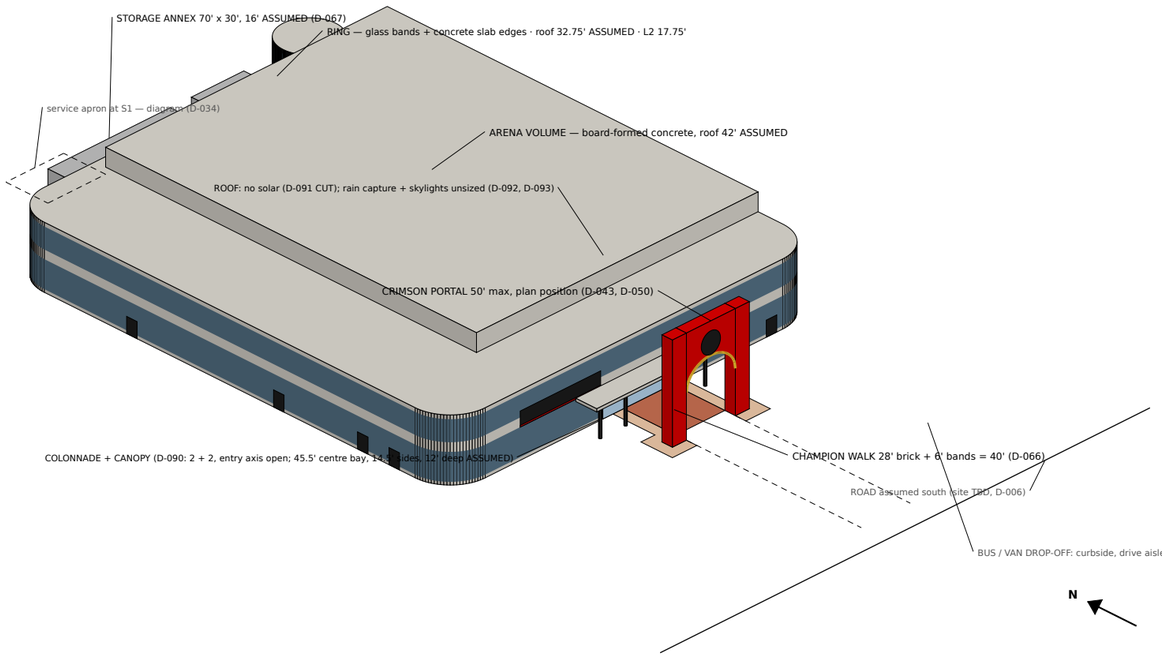


V3 AERIAL FROM SOUTHEAST

axonometric · not to scale

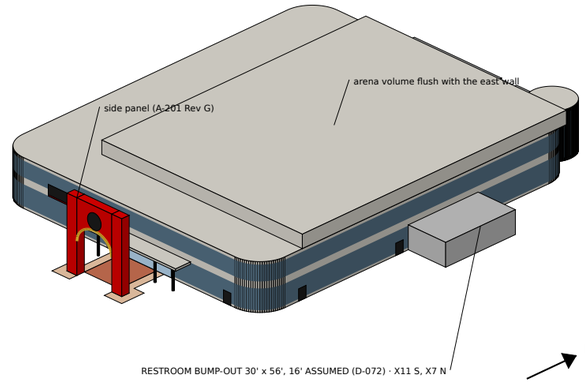


V5 PORTAL + CHAMPION WALK FROM SOUTH-SOUTHWEST

axonometric · not to scale

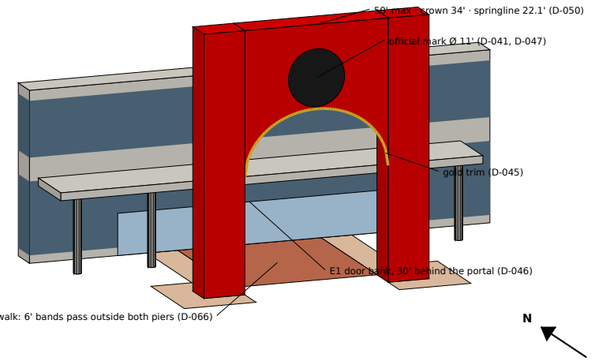


V4 AERIAL FROM NORTHWEST (SERVICE SIDE, S1)

axonometric · not to scale

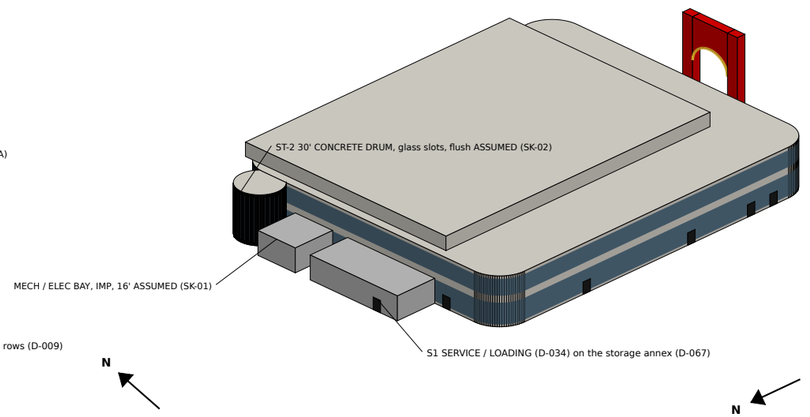

V2 CUTAWAY AT L2 FF 17'-9" FROM SOUTHWEST — ROOFS REMOVED

axonometric · not to scale · roofs removed, L1 ring cut solid at L2 FF

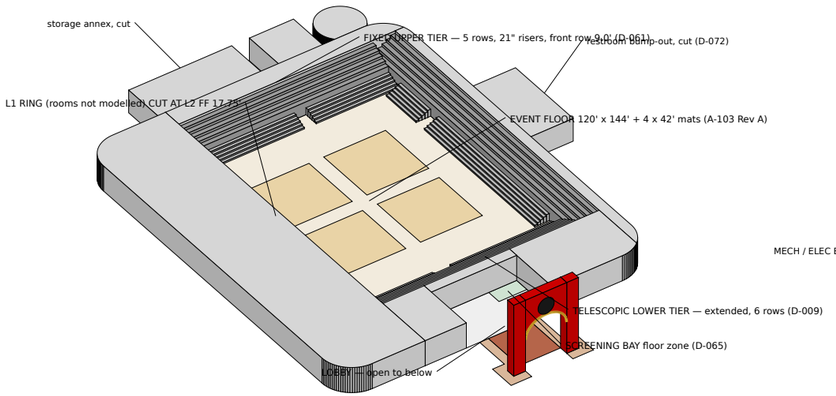

MASSING ONLY. Volumes from the current schematic params; materials, openings, parapets, roof equipment and structure are not designed. Every height not marked DECIDED is ASSUMED (P2-A-201 Rev G). Not a rendering of a final design.

HEIGHTS MODELLED

L2 FF 17.75' DECIDED (D-061) · ring roof 32.75' ASSUMED · arena roof 42' ASSUMED (P2-A-201 Rev G) · portal 50' max, crown 34', springline 22.1' (D-050) · tiers per P2-A-301 Rev D / A-302 Rev C. Door symbols 6' x 8' ASSUMED.

DECISIONS MODELLED — 2026-10-04 .. 2026-10-14 (D-072 .. D-093)

- D-054 .. D-087 DECIDED: building, annex, bump-out, drum, bay, walk and bus-loop cut as Rev F (chairs-only floor, 40 ft walk, R 20 corners).
- D-074 DECIDED: SRM HQ look: concrete slab-edge bands + glass per level, curved corners, drum with glass slots, colonnade + canopy (D-090: 2 + 2 columns, entry axis open), crimson portal (ASSUMED).
- SK: bay 16 ft and drum flush ASSUMED (SK-01 / SK-02 pending); column spacing 14.5 ft, canopy 12 ft, band levels ASSUMED.

NOTES

- NOT MODELLED: parapets (TBD), rooftop units, structure, windows / cladding, grading, landscaping, lighting, parking (site TBD, D-006), signage content (signage zone TBD), interior rooms.
- SRM HQ look (D-074, Shane 2026-10-11): light-gray board-formed concrete (hex ASSUMED, no concrete gray in the scripts), continuous glass bands per level (ASSUMED levels), IMP on the one-storey pop-outs, crimson #CC0000 portal; gold trim / brick from A-201 Rev G. Walk + portal at the PLAN position (not the concept image). No new program; GSF 86,964 unchanged.
- D-091 solar CUT (no zones). D-092 roof rain capture for field irrigation, cistern TBD with civil. D-093 LED throughout + daylighting (glass bands, skylights where code allows; IECC 2015 C402.4.2 trigger). All unsized, none modelled.
- Model file: phase2/out/3d/P2-A-901_RevI_massing.obj + .mtl (feet, Y-up export; exterior, cutaway and portal sets).

Sources: phase2_massing.yaml + _rev_g.yaml, phase2_facade_srm.yaml, phase2_plan_rev_j.yaml, p2_plan_rev_n_geom.py, phase2_elev_rev_g.yaml, phase2_site_rev_h.yaml; Shane 2026-10-11 2:57 PM CT.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**3D MASSING MODEL VIEWS**	**NTS**	**October 2026**	**I**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-901**