TROJAN HORSE ARENA

Hazel Green Regional Athletic Complex

Hazel Green area, Madison County, Alabama (site TBD, D-006)

PHASE 2 — SCHEMATIC SET · REV G

Current design: P2-A-101 Rev N / A-102 Rev I, SRM look (A-201 Rev N, A-901 Rev I)

PROJECT DATA

Building	86,964 GSF = L1 57,896 + L2 29,068 (unchanged since A-101 Rev M)
Seats	2,200 (1,100 telescopic + 1,100 fixed); event floor chairs-only design case (D-054)
Exits	E1 (8 pairs, 512 in) + X1-X11; 4 stairs x 76 in; ST-2 in a 30 ft drum (D-082)
Heights	L2 FF 17'-9" (D-061); ring roof 32.75', arena roof 42' (ASSUMED)
Code basis	IBC 2021 (ASSUMED edition); AHJ Madison County / State of Alabama TBD (D-008)
Status	PRELIMINARY — conceptual design, not for construction or permit

CONTACT

Shane Brazelton

256-508-4608

brazeltonshane@gmail.com

GENERAL NOTES: Drawn by KEYSTONE (AI) for Shane Brazelton. Every value not cited is ASSUMED. A licensed architect and engineers must design, check and seal the work; the AHJ decides code questions (D-008). Supersedes G-001 Rev E (Set Rev F cover).

SHEET INDEX — PHASE 2 SET REV G (current revisions only)

SHEET	TITLE	REV	BASIS
P2-G-001	Cover sheet + sheet index	F	this sheet
P2-G-002	Code analysis — exit recheck	G	A-101 N / A-102 I; F1 closed
P2-G-003	Program test-fit + areas	N	D-086
P2-C-101	Site plan — campus diagram	H	no bus loop (D-087)
P2-A-101	Overall floor plan — Level 1	N	D-082..D-086
P2-A-102	Overall floor plan — Level 2	I	D-082, D-083, D-085
P2-A-103	Floor overlays — mats, seating, conversions	E	notes cite A-101 N / A-111 F
P2-A-111	Life safety plan — Levels 1 + 2	F	X1-X11; D-090 colonnade
P2-A-201	Exterior elevations — SRM look	N	D-074, D-090; notes D-091..93
P2-A-301	Building sections	F	drum, SRM bands, D-090
P2-A-302	Sight-line study	C	bowl only; unchanged
P2-A-401	Enlarged plans — lockers + core 2	E	key plan = A-101 N
P2-A-901	3D massing — SRM look	I	solar zones removed (D-091)
APPENDIX — STUDY SHEETS (for decisions, not revisions of the set)			
P2-SK-01	Study: mech / elec bay height	—	PENDING Shane / architect
P2-SK-02	Study: NE drum height	—	PENDING Shane / architect

Not current and not in this set: G-001 A-E, G-002 A-F, A-101 A-M, A-102 A-H, A-103 A-D, A-111 A-E, A-201 A-M, A-301 A-E, A-401 A-D, A-901 A-H, C-101 A-G and Set Rev A-F (archive). The earlier Gemini ARCH D package was superseded and removed.

DESIGN DIRECTION

- D-074 SRM HQ language: board-formed concrete slab-edge bands with continuous glass per level, no square corners (R 20'), 30' concrete drum with glass slots, slender colonnade + canopy at the lobby, crimson portal. Band levels and canopy 12' ASSUMED.
- D-090 Colonnade re-spaced: 2 + 2 columns, entry / portal centre line OPEN, 45.5' centre bay on the portal and walk, 14.5' side bays (ASSUMED); E1 clear 528 in ≥ 512 (PASS).
- D-091 Solar CUT (no zones). D-092 roof rain capture for field irrigation, cistern TBD with civil. D-093 LED throughout + daylighting (glass bands, skylights where code allows: IECC 2015 C402.4.2 trigger, R-028). All unsized.
- D-087 Bus loop CUT. Service stays at the north door S1; team bus / van drop-off curbside on the parking drive aisle (ASSUMED, TBD with the parcel, D-006).
- D-082..D-086: 30' drum for ST-2, drum door, east side = D-072, landing note, old NE strip = MECH (remote).

OPEN DECISIONS

- SK-01 mech / elec bay height: 16' as drawn (= annex), taller (e.g. 24', A) or full height to the 32.75' ring roof. PENDING.
- SK-02 NE drum height: flush with the ring roof as drawn, rising as a tower (e.g. +8', A) or stop at stair / roof-access height. PENDING.
- Mechanical 4.95 % of GSF vs the 5 % target (D-072): 47 SF short; MEP engineer to size. OPEN.
- East-face glazing: the east wall is flush with the 42' arena volume; drawn concrete, no glass (A-201 Rev L, ASSUMED). Glass or not? OPEN.
- Egress finding (G-002 Rev G): X6 discharge grading at the NE corner (F2). F1 closed by D-090.
- Parcel (D-006), parking ordinance, cistern size (civil), trademark search (D-042), brick pricing (D-044).

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**COVER SHEET SHEET INDEX + DECISIONS**	**NTS**	**October 2026**	**F**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-G-001**

CODE ANALYSIS — EXIT RECHECK (REV G) · P2-A-101 REV N / A-102 REV I · CURRENT DESIGN

Supersedes Rev F (same tables; colonnade re-spaced, D-090, F1 closed) and Rev E (A-101 Rev K basis). Method and factors as Rev D / E (IBC 2021 T1004.5, 1005.3, 1005.5, 1030.2, T1017.2, T1006.2.1, 1007.1.1). Not a code review: architect + AHJ confirm (D-008).

1 WHAT CHANGED SINCE REV E (all ASSUMED unless cited)

- ST-2 = 30 ft drum (D-082): the 27.2 ft stair diagonal fits with 1.5 ft to spare, so Rev E finding F1 is CLOSED. Drum door 64 in at 235° (D-083); landing overlap left to the architect (D-085).
- East side = D-072 / plan Rev J (D-084): bump-out 42 ft south, X7 back on the wall, X11 new, 8 ft public corridor. Old NE stair strip = MECH (remote) (D-086).
- Bus loop cut (D-087); A-201 Rev M colonnade: 2 + 2 columns, entry axis open (D-090, ASSUMED). Counts unchanged: E1 + X1-X11, 4 stairs x 76 in, 2,200 seats.

2 OCCUPANT LOAD — LEVEL 1 FIXED SPACES (Rev D method)

SPACE	SF (Rev N)	FACTOR	LOAD	
Boys + girls locker (2)	7,014	50	142	
Event lockers 1-4	3,600	50	72	
Flex / team assembly	1,767	15	118	
Flex / storage (SW)	972	300	4	
Equipment storage + room	1,000	300	4	
Mech / elec (7 rooms)	4,302	300	18	
First aid	120	150	1	
Concession	275	200	2	
Chair / table / stage storage (annex)	2,100	300	7	
Lower tier seats (telescopic)		seats	1100	
L1 without the event floor			**1,468**	**Rev E 1,467**
L2 worst case (D-052): seats, S&C, X-train, admin, loop, rail			**1,460**	**Rev E 1,460**

Change: mech rooms now 7 incl. the bay and MECH (remote) (+1 occupant). L2 unchanged.

3 EXIT CAPACITY (doors 0.15 in / occ., 64 in per pair)

FLOOR CASE	FLOOR	BUILDING	NEED in	E1 ≥ ½	RESULT
Sports (50 gross)	329	3,257	488.5	244.3	PASS
Tables + chairs (15 net)	1,095	4,023	603.4	301.7	PASS
Chairs only (7 net) DESIGN	**2,346**	**5,274**	**791.1**	**395.6**	**PASS**
Standing (5 net) margin	3,284	6,212	931.8	465.9	PASS

Provided: E1 512 in (8 pairs) + 11 exits x 64 = 1,216 in. Lose E1: others 704 in ≥ ½ of the worst need (1005.5). PASS.

4 LEVEL 2 STAIR CAPACITY (0.2 in / occ.)

- 1,460 x 0.2 = 292.0 in vs 4 x 76 = 304 in (spare 12.0). Lose one stair: 228 ≥ 146.0. Stair discharge doors 1,460 / 4 x 0.15 = 54.8 in each of 64. PASS. ST-2 now really holds the 76 in stair (D-082).

5 EXIT LOCATIONS (tested on the Rev N outline)

EXIT	POSITION	NOTE	OK
X1	W wall (0.0, 50.0)	team assembly (D-078)	PASS
X2	W wall (0.0, 98.0)	girls locker	PASS
X3	W wall (0.0, 182.0)	boys locker	PASS
X4	N wall (42.7, 252.0)	ST-1 discharge	PASS
X5	N wall (127.8, 252.0)	EXIT (N), bay clear	PASS
X6	drum E face (197.0, 262.5)	ST-2 30 ft drum, east face; clear of bay / annex	PASS
X7	E wall (210.0, 179.1)	EXIT (E) on the wall, north of the bump-out (D-084)	PASS
X8	E wall (210.0, 34.0)	east concourse	PASS
X9	S wall (183.7, 0.0)	ST-3 discharge (D-078)	PASS
X10	W wall (0.0, 32.0)	ST-4 discharge (D-078)	PASS
X11	E wall (210.0, 112.0)	public corridor (E), south of the bump-out (D-084)	PASS
E1	S wall bank (113.0, 0.0)	8-pair bank x 87.25-138.75	PASS

Test: door on the envelope line, whole 64 in leaf on a straight wall (not in an R 20 arc), clear of annex / bay / bump-out; X6 on the drum.

6 TRAVEL · COMMON PATH · SEPARATION

- L1 exit access (T1017.2, A sprinklered, 250 ft): worst point 111 ft direct to the nearest exit at (103, 141); routed path TBD. X7 path T1 133 ft. PASS.
- L2 (Rev E method): loop worst 160 ft incl. 15 ft seat access. PASS.
- Common path (T1006.2.1, 75 ft): women (2) 61 ft, men (2) 30 ft. Dead end 5.2 ft (20). Corridor 96 in (44). PASS.
- Stair separation (1007.1.1, 1/3 of the 328 ft diagonal = 109 ft): shortest 141 ft. PASS.

7 DISCHARGE (D-087: no bus loop)

- All exits discharge to open grade; no drive crosses a discharge. Public-way route and grading: parcel TBD (D-006).
- E1 passes the colonnade (D-090): open centre bay 528 in, 582 in clear in front of the bank, whole front 840 in, each ≥ 512 in; then the 40 ft walk around / through the portal (D-066). PASS.

8 FINDINGS (options; not redesigned)

- F1 CLOSED (D-090, Shane 7:19 PM CT): colonnade re-spaced 2 + 2, entry / portal centre line open; centre bay 528 in clear, 582 in clear in front of the bank, both ≥ 512 in. PASS.
- F2 X6 discharges between the drum and the bay corner (3 ft apart, west of the door). Confirm the NE walk / grading so X6 reaches open ground (D-006).
- F3 Mechanical 4.95 % vs 5 % (D-072, MEP OPEN). Not an egress item; listed for the set.

9 OPEN FOR THE ARCHITECT / AHJ

- Everything in Rev D section 12 stands: editions + AHJ (D-008), construction type, smoke-protected seating, tier structure, door widths. Drum door landing (D-085). Curved-shell structure.

Sources: p2_egress_rev_n.py; p2_plan_rev_n_geom.py (A-101 Rev N / A-102 Rev I); phase2_facade_srm.yaml; P2-G-002 Rev D / E; IBC 2021 as cited; D-052, D-054, D-066, D-072, D-082..D-087, D-090.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**CODE ANALYSIS EXIT RECHECK**	**NTS**	**October 2026**	**G**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-G-002**

PROGRAM + AREA — REV N · P2-A-101 REV N / A-102 REV I · OLD NE STAIR STRIP = MECH (REMOTE), D-086

Program lines unchanged from P2-G-003 Rev K (frozen, Set Rev D). Drawn size (D-057) measured on P2-A-101 Rev N / A-102 Rev I. No SF cap (D-056). Planning only: architect confirms.

1 SIZE — D-057: L1 FOOTPRINT · L2 AREA · TOTAL GSF · CHANGE

	SET REV D	REV M / I	REV N / I	vs M / I	vs SET REV D
L1 FOOTPRINT	56,861	57,896	57,896	±0	+1,035
L2 AREA	28,933	29,068	29,068	±0	+135
TOTAL GSF	**85,793**	**86,964**	**86,964**	**±0**	**+1,171**

Drawn on: SET REV D = P2-G-003 Rev K (A-101 J / A-102 F); REV M / I = P2-G-003 Rev M (D-082..D-084); REV N / I = this sheet. Totals are the sum of the rounded levels.

GSF unchanged vs Rev M / I: the 67 SF strip was already inside the envelope; D-086 only names it.

2 HOW L1 AND L2 ARE MEASURED (Rev G method, D-079)

- Envelope = 210 x 252 ft box with R = 20 ft corners (D-077) united with the 30 ft drum at (182, 262.5): 53,216 SF.
- L1 = envelope + storage annex 2,100 + mech / elec bay 900 (x 134-164) + restroom bump-out 1,680 (y 119-175) = 57,896.
- L2 = envelope - open-to-below 24,148 (arena 132 x 168 + lobby 58 x 34) = 29,068.

3 PROGRAM (carried from P2-G-003 Rev K; no program line changes)

PROGRAM LINE (G-003 K)	SF	DRAWN REV N	DRAWN - PROG.
L1 gross incl. annex + bump-out	56,713		
L2 gross (rooms x 1.25 + loop)	28,186		
L1 + L2 gross	84,899		
Program footprint (max + annex + bump-out) vs L1	58,195	57,896	-299
PROGRAM TOTAL GSF vs drawn TOTAL	**86,381**	**86,964**	**+583**

The drum, the R = 20 ft envelope and the bay are circulation / building form, not program lines; the stair line (4 x 76 in, 31 risers, 12.67 x 24.08 ft each) is unchanged. Mechanical is not a separate program line (5 % of gross, R-014); see 5.

4 ROOMS THAT CHANGE vs REV M / I (SF net of stairs)

LEVEL / ROOM	REV M / I	REV N / I	CHANGE
L1 30 MECH (remote) (old NE stair strip)	0	67	+67

All other rooms on both levels unchanged (P2-A-101 Rev N, P2-A-102 Rev I).

5 MECHANICAL vs 5 % OF GSF (D-072 method, R-014)

TAG / ROOM	REV M	REV N	CHANGE
3 MECH / ELEC (NW)	931	931	±0
15 MECH (N)	564	564	±0
16 MECH (E)	675	675	±0
22 MECH (NE)	505	505	±0
28 MECH (E2)	660	660	±0
29 MECH / ELEC BAY	900	900	±0
30 MECH (remote)	0	67	+67
TOTAL MECHANICAL	**4,234**	**4,302**	**+67**
% of TOTAL GSF	**4.87 %**	**4.95 %**	**+0.08**

Target 5 % of 86,964 = 4,348 SF: 47 SF short. Set Rev D: 3,496 / 85,793 = 4.1 % (D-072). The rise since Set Rev D is mostly the 900 SF MECH / ELEC BAY (D-081). Planning check only; the MEP engineer sizes the rooms.

6 CARRIED FROM REV M (no change)

- Stair fit 1.49 ft spare in the 30 ft drum (D-082). Drum door at 235°, landing left for the architect (D-085).
- East side: T1 133 ft; common path 61 / 30 ft; corridor 96 in; dead end 5.2 ft (P2-G-003 Rev M).

7 FINDINGS + OPTIONS (not redesigned here)

F1 30 MECH (remote) does not touch the MECH / ELEC BAY (22.3 ft away) and has no door drawn. It shares 18.4 ft of wall with MECH (NE) 22 and 2.0 ft with MECH (N) 15. Options: (a) reach it through MECH (NE) 22; (b) merge it into 22; (c) MEP engineer decides. It is about 6 ft deep, so equipment fit is TBD.

F2 Mechanical 4.95 % vs 5 % (47 SF short); MEP OPEN (D-072).

F3 Drum door landing reaches 4.9 in onto the Level 2 loop: left for the architect (D-085). X7 / X11 discharge TBD (D-006).


8 SOURCES

D-057, D-072, D-077..D-086 (DECISIONS_ARENA); R-014; params/phase2_plan_rev_j.yaml (= Set Rev D A-101 J), _rev_k, _rev_g_l2, _rev_m, _rev_n; phase2_life_safety_rev_d.yaml / phase2_code_rev_d.yaml (handoff, read only); IBC 2021 1010.1.5, T1017.2, T1006.2.1, 1020.5, T1020.3. Revs A-M of P2-G-003 unchanged.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**PROGRAM + AREA MECHANICAL · D-086**	**NTS**	**October 2026**	**N**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-G-003**


PARCEL / PROPERTY LINES, SETBACKS, PARKING, UTILITIES, STORMWATER: TBD (D-006)

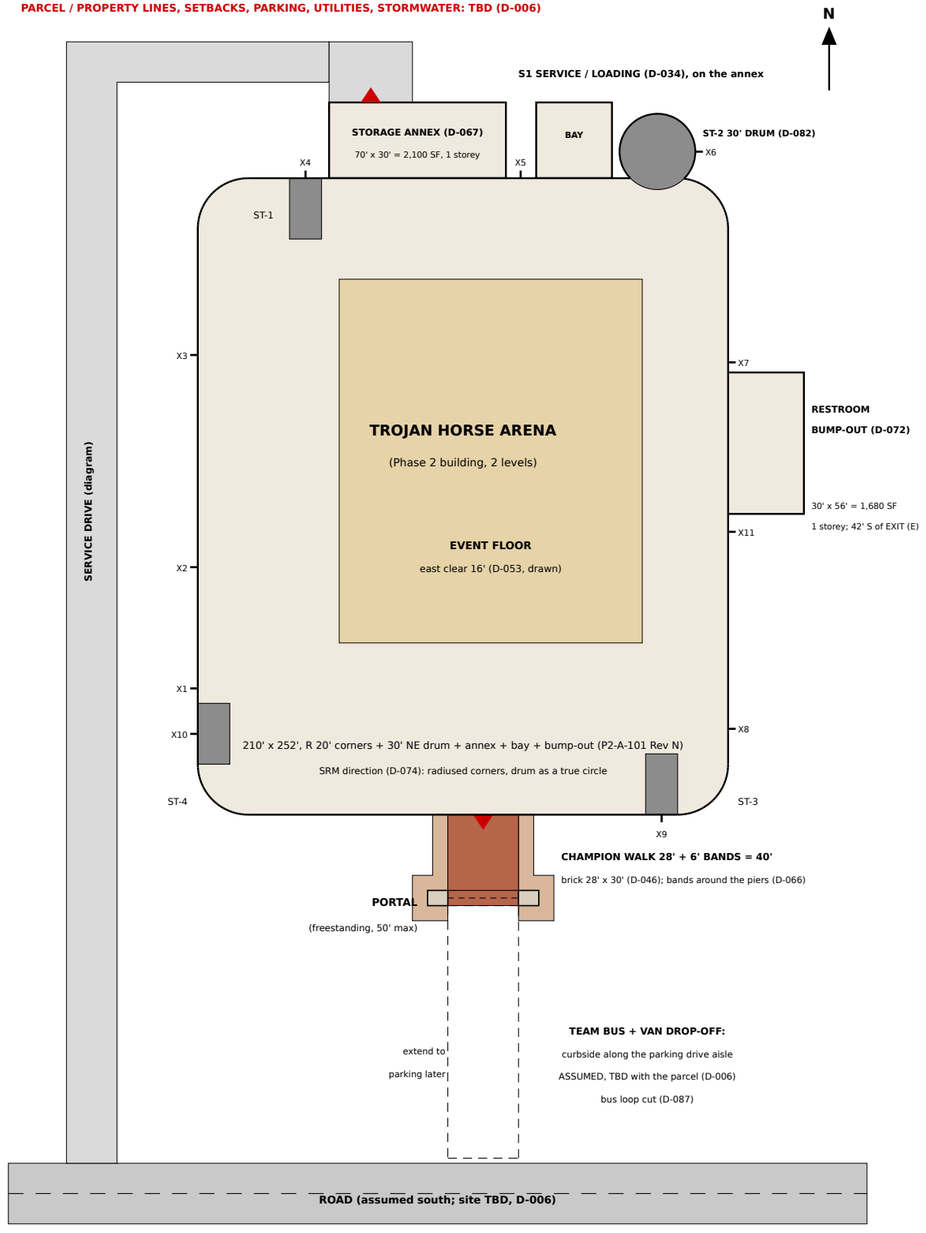

1 SITE PLAN — CAMPUS DIAGRAM (SITE TBD)

1" = 60'-0" · north approximate · road assumed south · diagram only (no surveyed dimensions)

2 ENTRY — PORTAL + CHAMPION WALK — 1" = 30'

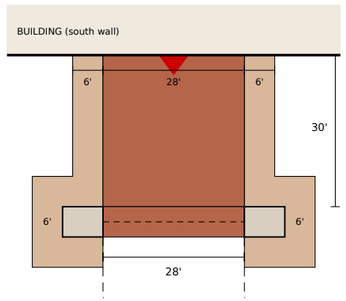

40' at the doors = 6 + 28 + 6 = 480 in ≥ 467.0 in (E1, standing margin)

bands pass outside both 8' piers: 6 + 28 + 6 = 40' at the portal (D-066)

LEGEND

- Building, P2-A-101 Rev N (R 20' corners, 30' drum)
- Exit stairs 76" clear (D-052)
- Event floor
- Champion Walk (brick, 28')
- Walk bands 6' each side (D-066)
- Portal piers (limestone)
- Service drive / apron (diagram)
- Road (assumed)
- E1 main entry / S1 service door

SIZE — D-057 (no cap, no margin; D-056)

	REV H (A-101 N)	REV G (SET D)	DELTA	PROGRAM K	DRAWN − PROG.
L1 FOOTPRINT	**57,896**	56,861	+1,035	58,195	−299
L2 AREA	**29,068**	28,933	+135	28,186	+882
TOTAL GSF	**86,964**	**85,793**	**+1,171**	**86,381**	**+583**

Drawn = P2-A-101 Rev N / A-102 Rev I (P2-G-003 Rev N). Delta vs C-101 Rev G (Set Rev D building, A-101 J): R 20' corners (D-077), 30' drum (D-081, D-082), mech / elec bay (D-081). Program = P2-G-003 Rev K. Size is set by budget and parcel (D-012, D-006).

STATUS

- SITE TBD (D-006): this is a layout diagram, not a site plan for permit. Parcel, property lines, setbacks, grading, parking count, utilities and stormwater are TBD. AHJ (R-006): Madison County Inspection Department if the parcel is unincorporated (Hazel Green is); the county states no zoning limits on construction; county codes 2018 IBC / IFC / NFPA 101; State Fire Marshal 2021 IFC.

ENTRY + EXIT DISCHARGE (D-066 DECIDED, Shane 1:22 PM CT)

- Freestanding limestone portal over the walk (D-043), 50' max (D-050), 44' wide x 6' deep with 8' piers and a 28' arch (ASSUMED), 30' south of the E1 doors (D-046). Champion Walk 28' x 30' brick (D-046) + a 6' band each side = 40' at the doors = 480 in ≥ 467.0 in (E1 at the standing margin, P2-G-002 Rev B; IBC 2021 1028.3). At the portal the bands pass outside both piers: 6 + 28 + 6 = 40'. Bands paved now, could be brick later (D-044). Band shape between doors and portal ASSUMED. Dashed: later extension to parking.

TEAM BUS + SERVICE (D-087, Shane 2026-10-09 1:05 PM CT; D-034 service unchanged)

- Bus loop CUT (D-087 changes the south bus drop loop part of D-034). Team bus + van drop-off: curbside along the parking drive aisle, ASSUMED, TBD with the parcel (D-006); no loop drawn. Service / deliveries stay at north door S1 on the storage annex; the west-side drive and apron are diagrams (lane widths, turning templates, apron size TBD, civil).

BUILDING (AS DRAWN ON P2-A-101 REV N / A-102 REV I)


- 210' x 252' with R 20' corners (D-077) + 30' ST-2 drum on the NE corner (D-082) + storage annex 70' x 30' (D-067) + mech / elec bay 30' x 30' (D-081) + restroom bump-out 30' x 56' on the east wall, south of EXIT (E) (D-072, D-084). X7 on the wall, X11 off the public corridor, X6 on the drum east face, X1 / X9 / X10 as Rev K (D-078). Discharge paths to a public way TBD with the parcel (D-006).

FIRE ACCESS / WATER (TBD)

- Fire apparatus access roads, hydrants and fire flow per IFC Appendices B, C, D (State Fire Marshal, 2021 IFC; D107 recommended) and the county's 2018 IFC. Exit discharge from X1-X11 to a public way (IBC 1028) TBD with the parcel.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**SITE PLAN — CAMPUS DIAGRAM SITE TBD · SCHEMATIC**	**AS NOTED**	**October 2026**	**H**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-C-101**

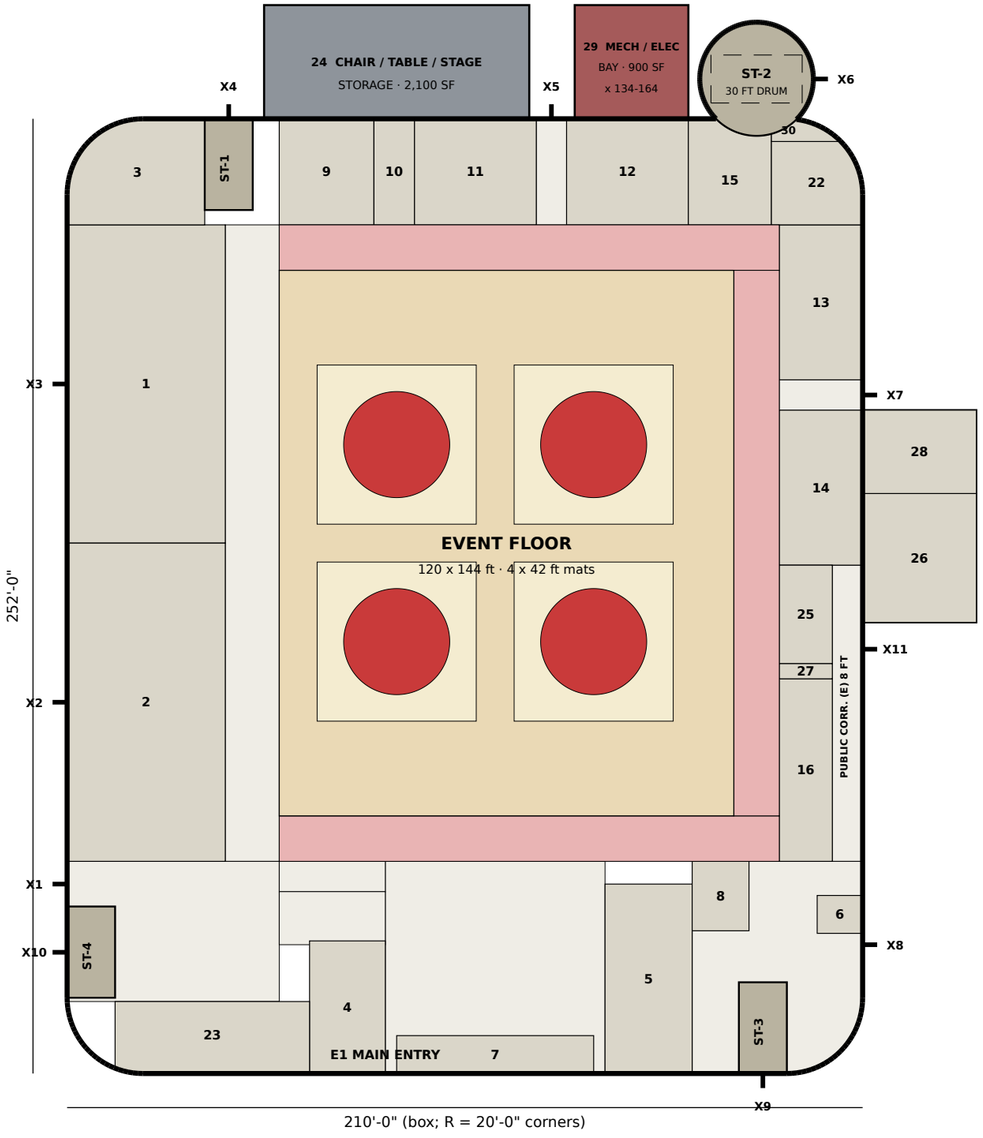

N

approx. · site TBD

SCHEMATIC — BLOCK PLAN, CONCEPT ENVELOPE

LEVEL 1 — OVERALL FLOOR PLAN (REV N)

Rev M (30 ft drum D-082, plan Rev J east side D-084) with the old NE stair strip made mechanical (D-086). Nothing else moves; Level 2 (P2-A-102 Rev I) is unchanged.

CHANGES FROM REV M (all ASSUMED unless cited)

- 30 MECH (remote): the old ST-2 strip inside the box, x 185.9-204.3, y 246-251.8 (to the drum and the R 20 corner), 67 SF. It does not touch the MECH / ELEC BAY 29 (22.3 ft away), so it is marked remote (D-086). It shares 18.4 ft of wall with MECH (NE) 22 and 2.0 ft with MECH (N) 15. No door drawn; access TBD.
- Mechanical: 4,234 -> 4,302 SF = 4.87 % -> 4.95 % of 86,964 GSF vs 5 % (D-072); 47 SF short. Set Rev D: 4.1 %.
- GSF unchanged: the strip was already inside the envelope.

MECHANICAL ROOMS (SF net of stairs; D-072 method)

TAG	ROOM	REV M	REV N	CHANGE
3	MECH / ELEC (NW)	931	931	+0
15	MECH (N)	564	564	+0
16	MECH (E)	675	675	+0
22	MECH (NE)	505	505	+0
28	MECH (E2)	660	660	+0
29	MECH / ELEC BAY	900	900	+0
30	MECH (remote)	0	67	+67
	TOTAL MECH (% of GSF)	**4,234 (4.87 %)**	**4,302 (4.95 %)**	**+67**

AREA CHECK (no SF cap, D-056; L1, L2, total vs last rev, D-057)

	REV M / I	REV N / I	CHANGE
L1 footprint (envelope + annex + bay + bump-out)	57,896	57,896	+0
L2 area (envelope - open-to-below)	29,068	29,068	+0
TOTAL GSF	**86,964**	**86,964**	**+0**

L1 = envelope polygon 53,216 SF + annex 2,100 + bay 900 + bump-out 1,680. L2 = envelope - open-to-below 24,148 SF (Rev G method, D-079). Rev M / I = P2-G-003 Rev M. Vs Set Rev D and program lines: P2-G-003 Rev N.

ROOM SCHEDULE — LEVEL 1 (SF net of stairs, Rev N)

1	BOYS LOCKER	3,507	**14**	EVENT LOCKER 4	900
2	GIRLS LOCKER	3,507	**15**	MECH (N)	564
3	MECH / ELEC (NW)	931	**16**	MECH (E)	675
4	MEN	700	**22**	MECH (NE)	505
5	WOMEN	1,150	**23**	FLEX / STORAGE	972
6	FIRST AID	120	**24**	CHAIR / TABLE / STAGE STORAGE	2,100
7	VESTIBULE	520	**25**	MEN (2)	364
8	CONCESSION	275	**26**	WOMEN (2)	1,020
9	EQUIP. STORAGE	700	**27**	DF / JAN.	56
10	EQUIP. ROOM	300	**28**	MECH (E2)	660
11	EVENT LOCKER 1	900	**29**	MECH / ELEC BAY	900
12	EVENT LOCKER 2	900	**30**	MECH (remote)	67
13	EVENT LOCKER 3	900			


OPEN (not decided here)

- East exits (Rev D method): X7 path 133 ft, women (2) common path 61 ft, men (2) 30 ft (75 ft max), corridor dead end 5.2 ft. Details: P2-G-003 Rev N.
- Structure of the curved shell and the 30 ft drum; tier depth 1'-6" or less (D-061). X7 / X11 discharge TBD (D-006).
- Mechanical 4.95 % vs 5 % (MEP OPEN, D-072); access to 30 MECH (remote) TBD.

Sources: params/phase2_plan_rev_j.yaml (= ARENA Set Rev D A-101 J); phase2_plan_rev_k.yaml; phase2_plan_rev_m.yaml; phase2_plan_rev_n.yaml; D-072, D-077..D-086.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**OVERALL FLOOR PLAN** **LEVEL 1 · BLOCK PLAN**	**1" = 40'-0"**	**October 2026**	**N**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-101**

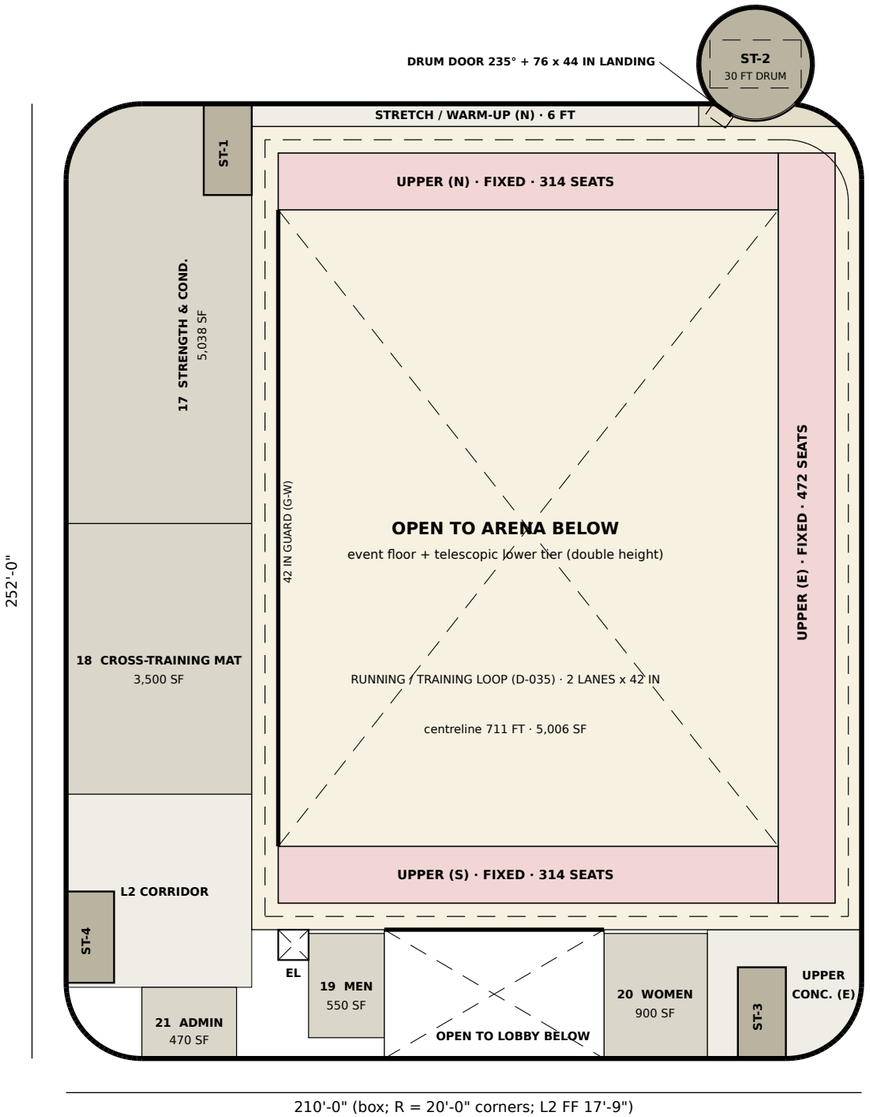

N

approx. · site TBD

SCHEMATIC — BLOCK PLAN, CONCEPT ENVELOPE

LEVEL 2 — OVERALL FLOOR PLAN (REV I)

Rev H with the drum at 30 ft (D-082) and the drum door slid west along the arc (D-083). Rooms, tiers, guards, seats, loop and the R 13 NE loop corner as Rev H. Rev H 29 ft drum dashed. Level 2 is the same in plan Rev I and Rev J.

CHANGES FROM REV H (all ASSUMED unless cited)

- ST-2: 30 ft drum, same centre; south edge y 247.5 (1.5 ft clear of the loop). Stair fit 1.49 ft spare (Rev H 0.49). +35 SF on this level.
- Drum door slides west from 240° to 235° (centre 173.4, 250.2): the most westerly point that keeps the 64 in pair inside the north wall (west jamb y 251.94). Door swings into the drum (direction of egress), so the loop width is not reduced.
- Landing (IBC 2021 1010.1.5: width >= 76 in stair, length >= 44 in): door centre to loop edge along the door line 61.7 in (Rev H 54.6). The full 76 x 44 in landing (dashed) reaches 4.9 in onto the loop's outer edge at one corner.

ROOM SCHEDULE — LEVEL 2 (SF net of stairs, inside the envelope)

TAG	ROOM	REV H	REV I	CHANGE
—	Upper tier, fixed (1,100 seats)	6,930	6,930	0
17	Strength & Conditioning	5,038	5,038	0
18	Cross-Training Mat	3,500	3,500	0
19	Men	550	550	0
20	Women	900	900	0
21	Admin	470	470	0
—	L2 Corridor	2,192	2,192	0
—	Upper Concourse (E)	994	994	0
—	Stretch / Warm-up (N)	708	708	0
—	ST-2 landing / NE corner (not programmed)	142	131	-11
—	Running / training loop	5,006	5,006	0

AREA CHECK (no SF cap, D-056; L1, L2, total vs last rev, D-057)

	REV L / H	REV M / I	CHANGE
L1 footprint (P2-A-101 Rev M)	57,861	57,896	+35
L2 area (envelope - open-to-below)	29,033	29,068	+35
TOTAL GSF	**86,894**	**86,964**	**+70**

L2 = envelope 53,216 SF - open-to-below 24,148 SF (arena 132 x 168 + lobby 58 x 34), the Rev F / G method. Rev L / H baseline = P2-G-003 Rev L. Carried to P2-G-003 Rev M.

OPEN (not decided here)

- Landing reaches 4.9 in onto the outer loop lane at one corner (strip alone at the east jamb: 35 in). Architect: count that corner of the corridor as landing (door swings away from it), or not. See P2-G-003 Rev M.
- Drum floor-to-floor, wall and roof; structure of the curved shell; tier depth 1'-6" or less (D-061).
- SRM / Summertown Metals roles are not agreed; names are descriptive, no marks used (D-042).


Sources: params/phase2_plan_rev_j.yaml (L2 as Rev F); phase2_plan_rev_k.yaml; phase2_plan_rev_g_l2.yaml; phase2_plan_rev_m.yaml; IBC 2021 1010.1.5; D-079..D-084.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**OVERALL FLOOR PLAN** **LEVEL 2 · BLOCK PLAN**	**1" = 40'-0"**	**October 2026**	**I**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-102**


(a) WRESTLING — 4 x 42' MATS, 2 x 2

1" = 50'-0" · tier open · NFHS clearances all PASS (table at right)

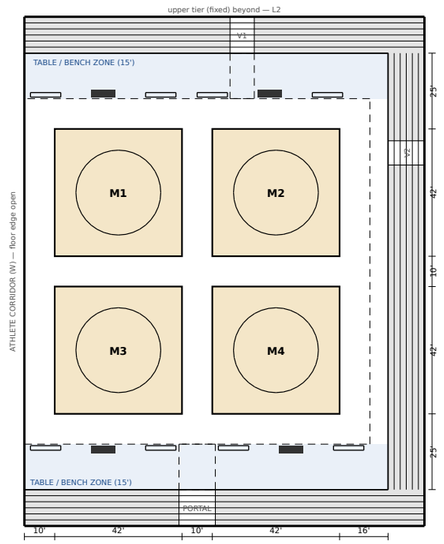


(b) BASKETBALL — 1 COURT (IN PARAMS)

1" = 50'-0" · tier open · mats up, court down, seats stay

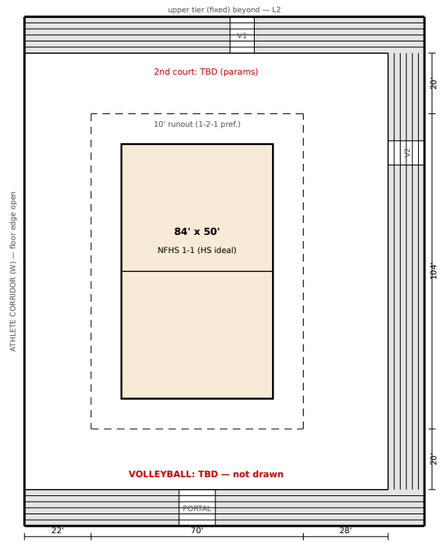


(c) TELESCOPIC LOWER TIER — OPEN vs CLOSED

1" = 50'-0" · 6 rows x 24 in = 12' open; 3'-6" closed (Hussey)

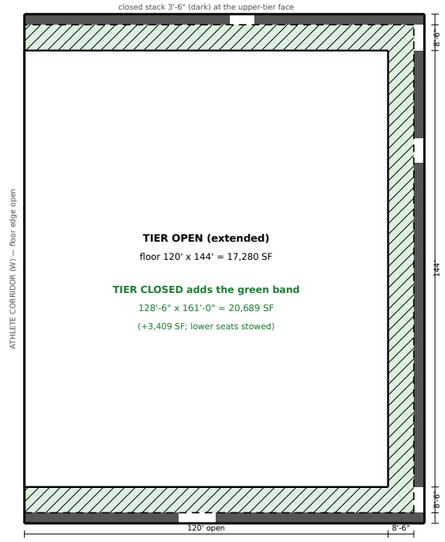

(d) EVENT-FLOOR CASES — P2-G-002 Rev G

1" = 100'-0" · 16,416 SF · chairs = design (D-054) · 8' V2 egress aisle kept (D-072)

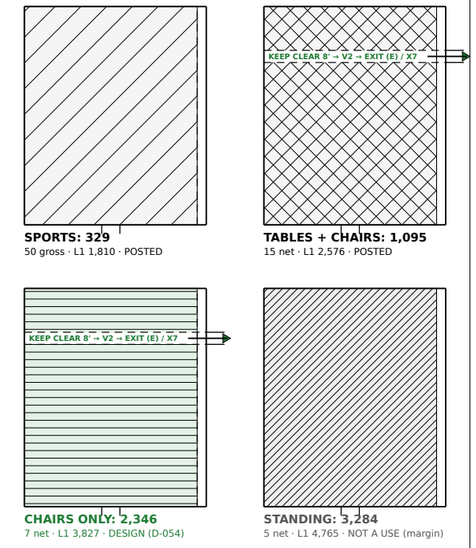

(a) WRESTLING — NFHS CLEARANCES ON THIS LAYOUT

RULE	ITEM	REQUIRED	DRAWN	
NFHS 2-1-2	Circle + safety area	>= 28 + 2 x 5 = 38 ft	42 ft mat (7 ft each side of a 28 ft circle)	PASS
NFHS 2-1-5	Space around each mat	>= 10 ft	W 10 · between 10 / 10 · E 16 · S / N 25 / 25	PASS
NFHS 2-3	Scorer's table to mat	>= 10 ft	10.5 ft	PASS
NFHS 2-1-5	Bench to mat / to table	>= 10 / >= 10 ft	10.5 / 10 ft	PASS
KHSAA (rec.)	Circle to walls / tier	about 10 ft	W 17 (open to corridor) · E 23 · S / N 32 / 32	PASS

Tables 8' x 2.5' and benches 10' x 1.5' ASSUMED (no size in NFHS text found), front edge 10.5' from the mat. Portal and V1 aisles kept clear (egress, P2-A-111). Tournaments: up to two team personnel in chairs at the mat edge (NFHS 2-2-2); dual meets can use one mat (R-005.5). Rule text: NFHS 2014-15 (R-005); current book UNVERIFIED. 28' circle drawn = NFHS minimum (42' mats are often sold with a 32' circle).

(b) BASKETBALL / VOLLEYBALL — FROM PARAMS ONLY

1 court (phase2.yaml basketball_full_courts: 1): 84' x 50' (NFHS 1-1) + 10' runout (1-2-1: >= 3', 10' preferred) = 70' x 104'; to the floor edge W 22' / E 28' / S 20' / N 20'. Clear height >= 25' (R-019). Boundary + division line only (other markings not drawn: not researched); team benches / scorer's table for basketball: TBD (not in params or decisions).

VOLLEYBALL: TBD — phase2.yaml volleyball_courts: TBD; R-012 volleyball not researched. Nothing drawn (no new program). 2nd basketball court: TBD (phase2.yaml basketball_second_court: TBD; 'only after clear span is measured').

(c) TELESCOPIC LOWER TIER — FLOOR ZONES

STATE	FLOOR ZONE	SF	LOWER SEATS
Open — extended 12' (6 x 24 in)	120' x 144'	17,280	1,100
Closed — 3'-6" stack	128'-6" x 161'-0"	20,689	0
Gain (N, S, E)	+8'-6" each side	+3,409	


Stack closes against the upper-tier face line (N y = 224, S y = 56, E x = 188): P2-A-302 Rev C keeps the stack in front of the upper-tier face, not recessed (open rows 5-6 would sit under < 7'-6"). Each side (N, S, E) operates on its own (ASSUMED; banks and motorization TBD, manufacturer). Folding and telescopic seating that is not a building element: ICC 300 (IBC 2021 1030.1.1). Spaces under bleachers: 1-hour separation unless an exception applies (1030.1.1.1) — architect. Portal, V1, V2 stay open through the stack.

CONVERSIONS + STORAGE (ASSUMED SEQUENCE)

- Wrestling: tier open; mats roll in from EQUIP. STORAGE at the top of the athlete corridor (plan Rev J, unchanged).
- Basketball: mats up and stored, court surface down (surface type TBD); seats stay (phase2.yaml floor_converts).
- Floor events: chairs, tables and stage carts come from the new Chair / Table / Stage Storage annex (2,100 SF, D-067) — route below. Tier open or closed per event. Every chair layout keeps the 8' V2 aisle open for egress (floor → V2 → EXIT (E) → X7). Restrooms: portal → Concourse (E) → public corridor → core 2 (D-072).
- Post the occupant load for each configuration near the main exit (IBC 2021 1004.9): sports, tables, chairs (design). Standing is not posted.

STORAGE → FLOOR

D-067 · 1" = 150' · route ASSUMED

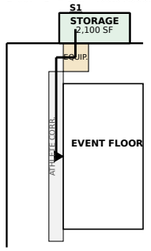

Chairs / tables / stage carts: annex → EQUIP. STORAGE → athlete corridor → floor (west edge open); deliveries via S1 on the annex north wall (D-034). Route ASSUMED; door sizes for 67 x 33.25 in trucks: architect.

Annex 70' x 30', one storey, north wall between X4 and X5; S1 moved to its north wall (y 282). Sized for 56 chair / table trucks (42 chairs + 8-10 tables each) + stage carts (D-067, aisle factor ASSUMED).

Screening bay (D-065) is in the lobby, outside these views: P2-A-101 Rev N / P2-A-111 Rev F.

Schematic overlays for the owner, the architect of record and the AHJ. Not a code review and no statement of approval (D-008). Sports rules quoted from older NFHS editions (current books paywalled): UNVERIFIED against the current edition. Furniture positions ASSUMED.

(d) EVENT-FLOOR CASES — POSTED LOADS (1004.9)

CASE	FACTOR	FLOOR	L1	LAYOUT NOTE
Sports	50 gross	329	1,810	POST the sports load. Mats (a) or court (b); tier open. Exercise 50 gross ASSUMED (AHJ assigns).
Tables + Chairs	15 net	1,095	2,576	POST. Keep the 8 ft V2 egress aisle clear. Aisles measured 19 in from the table edge (1030.13.1); level aisles 42 / 36 in (1030.9.1). Layout TBD.
Chairs Only	**7 net**	**2,346**	**3,827**	**POST — DESIGN CASE (D-054). Keep the 8 ft V2 egress aisle clear. Rows: >= 12 in clear up to 14 seats, + 0.3 in per seat beyond, <= 100 per row, aisles both ends (1030.13.2).**
Standing	5 net	3,284	4,765	NOT A USE: no standing-floor events (D-054). Kept only as exit margin: L1 exits stay as drawn (E1 467.0 in vs 468 in clear).

Floor = 16,416 SF (G-002 Rev G, 114' x 144'; the east 6' strip, D-053, unhatched); L1 = floor + 1,100 lower seats + 381 other L1 rooms (incl. the storage annex, 300 gross). Design case = chairs: L1 3,827. Tier CLOSED, chairs: 2,956 on 20,689 SF with no lower seats → L1 3,337, below the design case; restroom load 2,956 < 3,446 (net = gross ASSUMED). Whole drawn zone standing (17,280 SF = 3,456) would need E1 479.9 in vs 468 in clear beside the screening bay: not permitted (standing is not a use).

CHAIR LAYOUTS — V2 EGRESS AISLE (D-072)

8 ft (96 in) EGRESS cross-aisle on the V2 line (y 175.09-183.09), full floor width: west edge (athlete corridor, open) -> east 6 ft strip -> V2 -> EXIT (E) -> X7 (clear, D-072). Restroom traffic goes out the portal to Concourse (E) and the public corridor, not this way. Width = V2 / EXIT (E) width (ASSUMED); >= 36 / 42 in level-aisle minimum (IBC 2021 1030.9.1). Lies inside the 16,416 SF floor: posted loads unchanged (net floor area basis ASSUMED, AHJ). No chairs, tables or stage in it.

DECISIONS — SHANE 1:21 / 1:22 / 3:31 PM CT + D-070 / D-072

- D-054 DECIDED: chairs-only floor (7 net -> 2,346) is the design case; exits stay as drawn for standing (margin).
- D-064 DECIDED: restrooms sized to chairs-only; posted loads; temporary units above that.
- D-065 DECIDED: screening in a side bay of the lobby, 468 in clear kept beside it (P2-A-101 Rev N, P2-A-111 Rev F; outside these views).
- D-066 DECIDED: 40 ft walk at the doors (28 ft brick + 6 ft bands), flows around both portal piers (P2-C-101 Rev E).
- D-067 DECIDED: 2,100 SF chair / table / stage storage annex at the north wall, S1 on it (route: STORAGE → FLOOR on this sheet).
- D-069 DECIDED: core 2 (second restroom pair) in a one-storey 30 x 56 ft bump-out now reached from Concourse (E) by the public corridor (P2-A-101 Rev N, P2-A-401 Rev E).
- D-070 DECIDED: core 2 stays on the EAST wall.
- D-072 DECIDED: public corridor (E) from Concourse (E) to core 2, bump-out 42 ft south of EXIT (E), X11; restroom traffic never crosses the floor — the V2 aisle stays for egress.


LEGEND

Grey band = telescopic lower tier open (thin lines = 24 in rows) · dark band = closed stack · tan = mat (circle = 28' NFHS minimum) · black bar = scorer's table · open bar = team bench · blue = table / bench zone · dashed = 10' mat area / keep-clear aisle / runout · green hatch = floor gained when closed · (d): green = design case, grey = not a use · route: green = storage annex, tan = equipment storage, line = cart route. (d): white band + arrow = 8' keep-clear aisle to V2.

Sources: params/phase2_overlays.yaml, phase2_overlays_rev_d.yaml; phase2_plan_rev_j.yaml; phase2_code_rev_d.yaml; R-005 (NFHS Wrestling 2-1-2, 2-1-5, 2-2-1, 2-2-2, 2-3; KHSAA); R-012; R-019; R-008 / Hussey MAXAM; R-007.2 (IBC 2021 T1004.5); IBC 2021 1004.9, 1030.1.1, 1030.9.1, 1030.13.1, 1030.13.2 (UpCodes, retrieved 2026-10-04); P2-G-002 Rev D / G; P2-A-101 Rev N; P2-A-111 Rev F; P2-A-401 Rev E; D-053, D-054, D-064 to D-072; Shane 2026-10-04 evening; 2026-10-11 7:19 PM CT.


PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**FLOOR OVERLAYS** **MATS, SEATING + CONVERSIONS**	**AS NOTED**	**October 2026**	**E**	Drawn by Claude (AI) for Shane Brazelton	**P2-A-103**

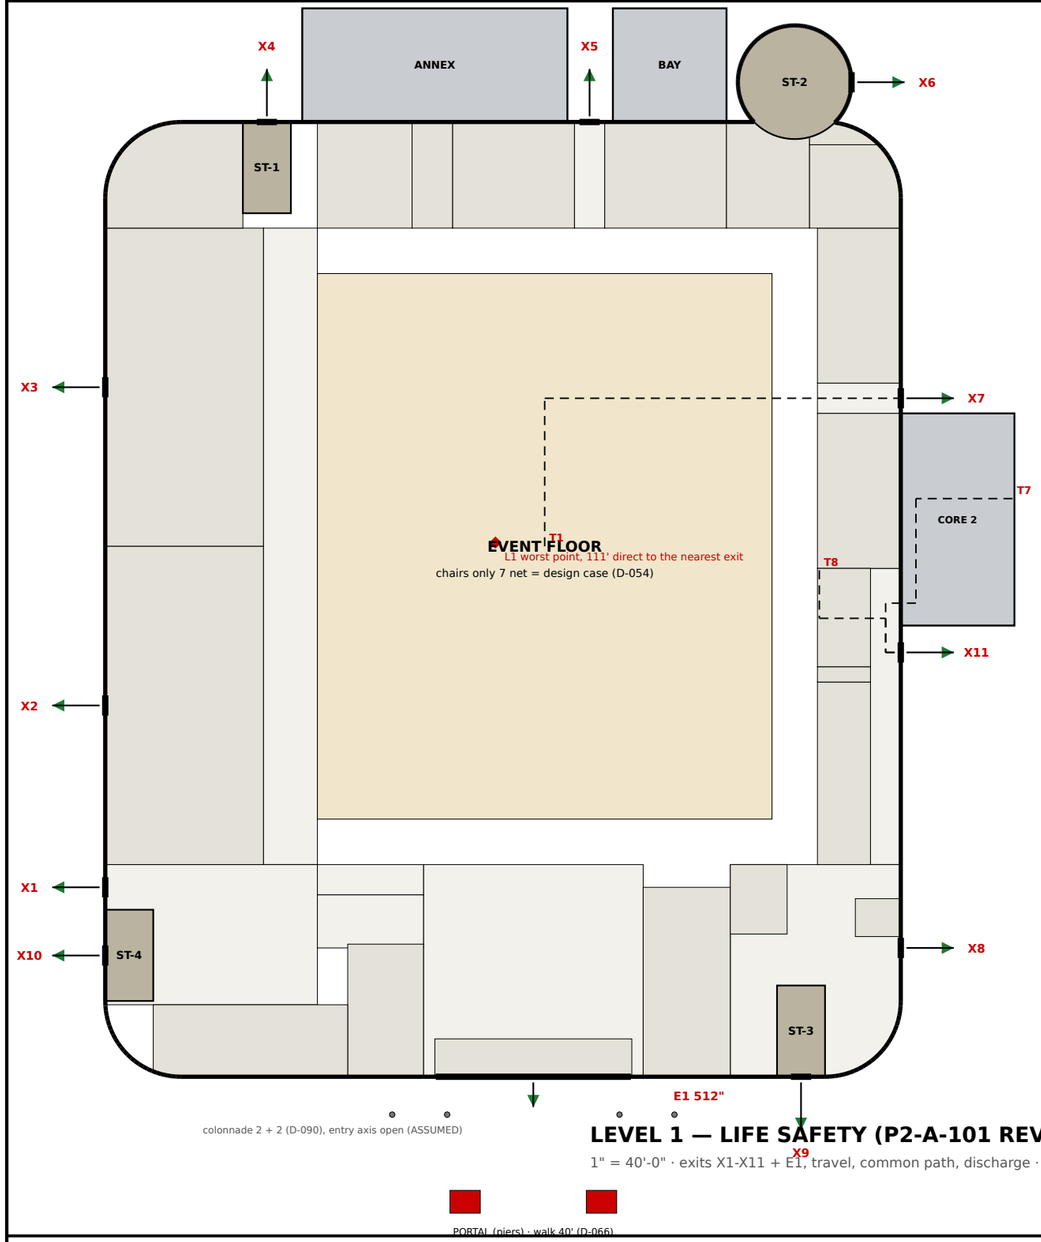

LEVEL 1 — LIFE SAFETY (P2-A-101 REV N)

1" = 40'-0" · exits X1-X11 + E1, travel, common path, discharge · no bus loop (D-087)

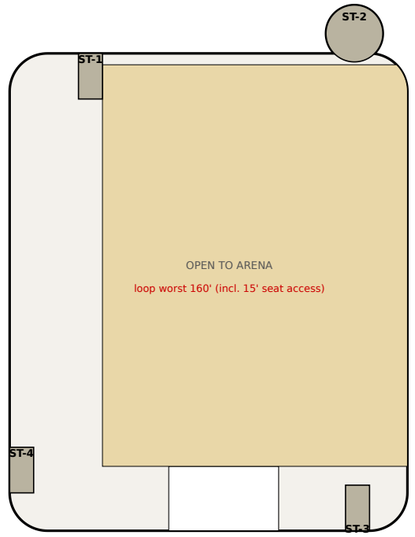

LEVEL 2 — STAIRS + LOOP (P2-A-102 REV I) · 1" = 80'

N

EXITS (each tested on the Rev N outline)

EXIT	POSITION	SERVES	OK
X1	W (0.0, 50.0)	team assembly (D-078)	PASS
X2	W (0.0, 98.0)	girls locker	PASS
X3	W (0.0, 182.0)	boys locker	PASS
X4	N (42.7, 252.0)	ST-1 discharge	PASS
X5	N (127.8, 252.0)	EXIT (N), bay clear	PASS
X6	drum E face (197.0, 262.5)	ST-2 30 ft drum, east face; clear of bay	PASS
X7	E (210.0, 179.1)	EXIT (E) on the wall, north of the bump-	PASS
X8	E (210.0, 34.0)	east concourse	PASS
X9	S (183.7, 0.0)	ST-3 discharge (D-078)	PASS
X10	W (0.0, 32.0)	ST-4 discharge (D-078)	PASS
X11	E (210.0, 112.0)	public corridor (E), south of the bump-o	PASS
E1	S bank (113.0, 0.0)	8-pair bank x 87.25-138.75	PASS

CAPACITY (doors 0.15 in/occ., 64 in per pair; stairs 0.2)

FLOOR CASE	BLDG OCC.	NEED in	E1 ½	PROVIDED
Sports (50 gross)	3,257	488.5	244.3	1,216 / E1 512
Tables + chairs (15 net)	4,023	603.4	301.7	1,216 / E1 512
Chairs only (7 net) DESIGN	**5,274**	**791.1**	**395.6**	**1,216 / E1 512**
Standing (5 net) margin	6,212	931.8	465.9	1,216 / E1 512

L2 worst 1,460 x 0.2 = 292.0 in vs 4 x 76 = 304 in; lose one stair 228 in. PASS.

TRAVEL · COMMON PATH · SEPARATION (IBC 2021)

- L1 travel (T1017.2, 250 ft): worst point 111 ft direct to the nearest exit (routed path TBD). X7 path T1 133 ft. PASS.
- L2 travel: loop worst 160 ft. PASS.
- Common path (75 ft): women (2) 61 ft, men (2) 30 ft. Dead end 5.2 ft (20). PASS.
- Stair separation (1007.1.1, 1/3 x 328 = 109 ft): shortest 141 ft (ST-1 to ST-2 drum door). PASS.

DISCHARGE (no bus loop, D-087)

- Every exit discharges straight to open grade; no bus loop or drive crosses a discharge. Route to a public way: parcel TBD (D-006).
- E1: through the open colonnade centre bay (528 in clear; 582 in in front of the bank) vs 512 in bank and around / through the portal on the 40 ft walk (D-066).
- X5 in the 12 ft lane between annex and bay; X6 off the drum east face (3 ft drum-to-bay gap is west of it); X7 / X11 to grade east (D-084).


FINDINGS (not redesigned)

- F1 CLOSED (D-090, Shane 7:19 PM CT): colonnade re-spaced 2 + 2, entry / portal centre line open; centre bay 528 in clear, 582 in clear in front of the bank, both ≥ 512 in. PASS.
- F2 X6 opens toward the bay corner (drum-to-bay 3 ft): the landing outside X6 faces east, clear; confirm grading / walk at the NE corner (D-006).

Sources: p2_egress_rev_n.py (P2-G-002 Rev G); p2_plan_rev_n_geom.py; phase2_facade_srm.yaml; phase2_site.yaml portal; D-054, D-066, D-072, D-078, D-082..D-087, D-090.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**LIFE SAFETY PLAN LEVELS 1 + 2 · SCHEMATIC**	**1" = 40'-0"**	**October 2026**	**F**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-111**

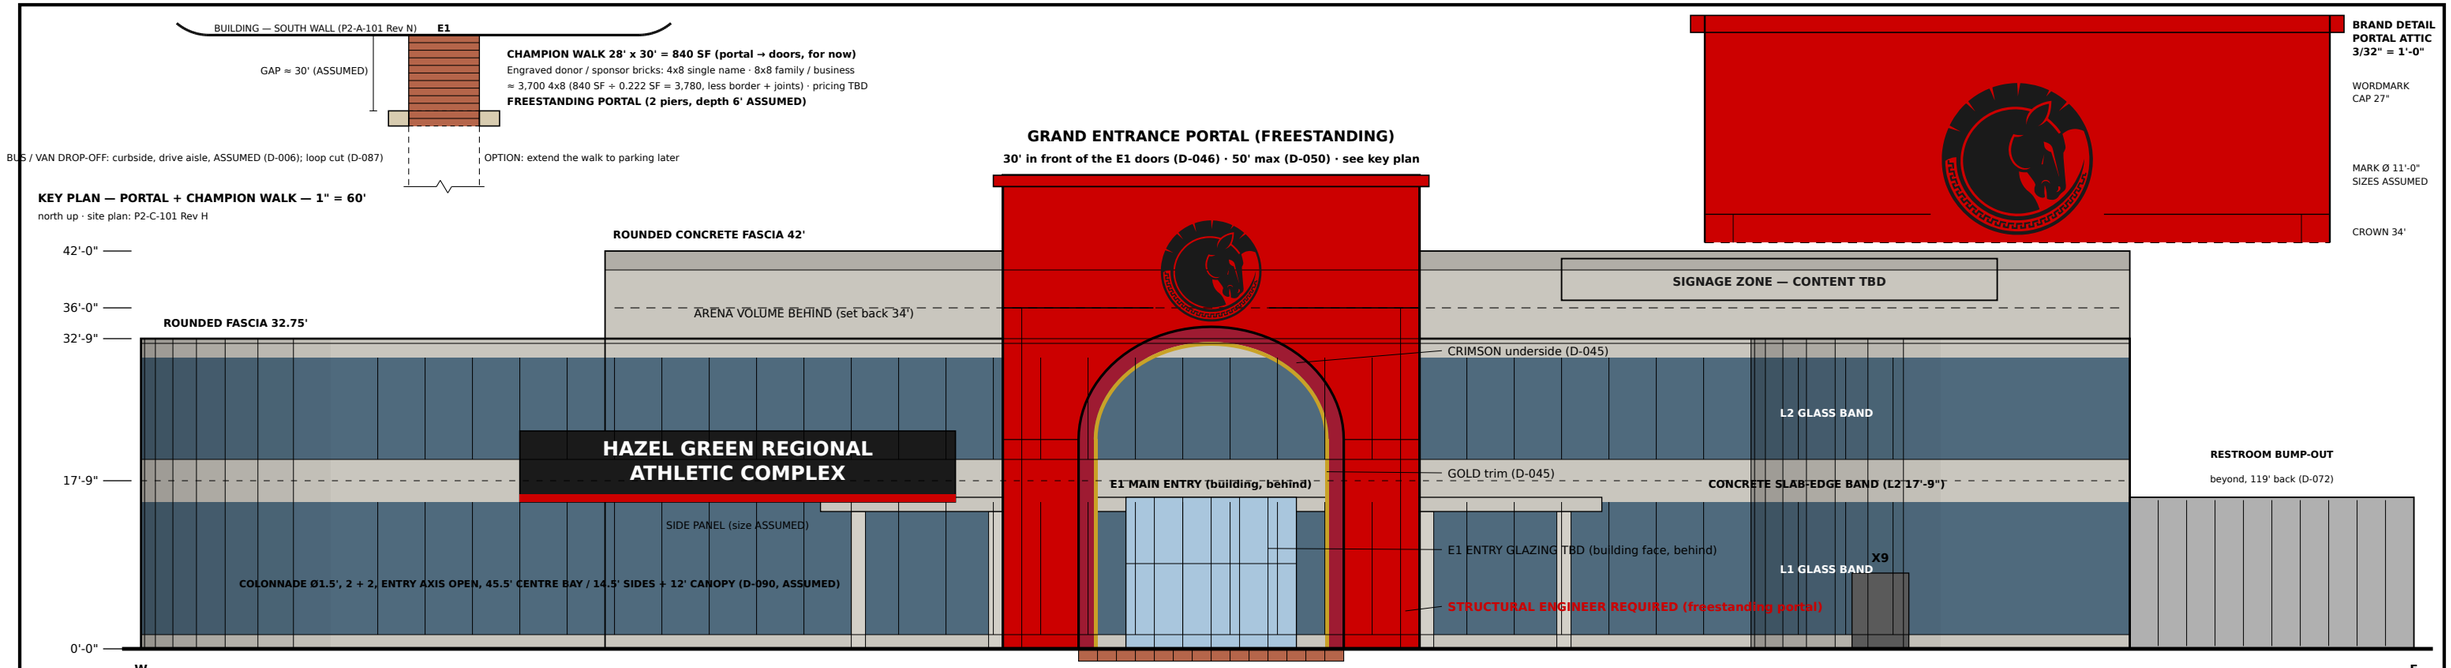


NOTES

- HEIGHTS: L2 FF 17'-9" (D-061 DECIDED), ring roof 32.75' (L2 + 15') ASSUMED. Arena clear ≥ 25' REFERENCE (NFHS via Draper, LA RAP; R-019). U/S structure 36', roof 42' ASSUMED. Upper tier steps DOWN from the loop: 21" risers, front row 9.0' (7'-6" clear, D-061); highest aisle = loop 17.75' (1030.6.2.2 if smoke-protected: ≥ 32.75'; 36' U/S drawn).
- PORTAL: FREESTANDING CRIMSON (#CC0000) arch (Shane 2026-10-11; was limestone) 30' in front of the E1 doors over Champion Walk (D-043, D-046); 50' max (D-050): crown 34', springline 22.1', depth 6' ASSUMED; underside crimson + gold trim (D-045). STRUCTURAL ENGINEER REQUIRED.
- BRAND: official mark Ø 11' (D-047) + wordmark on the portal, ASSUMED sizes. Trademark search OPEN (D-042).
- CHAMPION WALK: 28' x 30' brick (D-046), plan position kept; bricks / pricing OPEN (D-044). Bus loop cut (D-087).
- DOORS: symbols (6' x 8' ASSUMED) from P2-A-101 Rev N; X# EXIT ONLY (D-033); X6 on the drum, X7 on the wall, X11 off the corridor, S1 on the annex.
- OUTLINE = A-101 Rev N (GSF 86,964 unchanged). SRM HQ look (D-074): concrete slab-edge bands + glass per level, curved R 20' corners, concrete drum with glass slots, colonnade (D-090: 2 + 2 columns, entry axis open, 45.5' centre bay) + canopy, IMP pop-outs. Band levels, spacing, canopy ASSUMED (phase2_facade_srm.yaml).
- NOT SHOWN: rooftop units, cistern (D-092), skylights + LED (D-093), grading. Solar CUT (D-091).
- OPEN: ETFE roof. Bay 16' (SK-01) and drum flush (SK-02) ASSUMED, pending.


PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**EXTERIOR ELEVATIONS SCHEMATIC · COLOR**	**AS NOTED**	**October 2026**	**N**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-201**

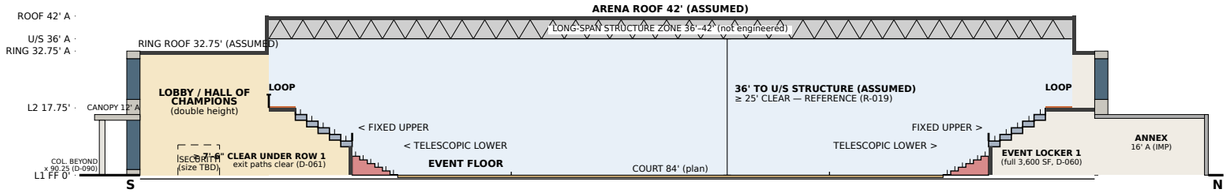


1 SECTION A-A (NORTH-SOUTH) — looking west

1" = 40'-0" · x = 100 (see key plan)

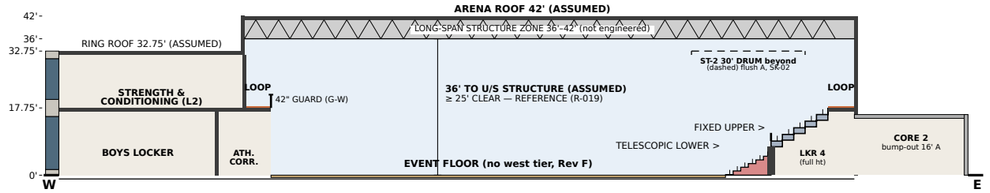


2 SECTION B-B (EAST-WEST) — looking north

1" = 40'-0" · y = 150 (see key plan)

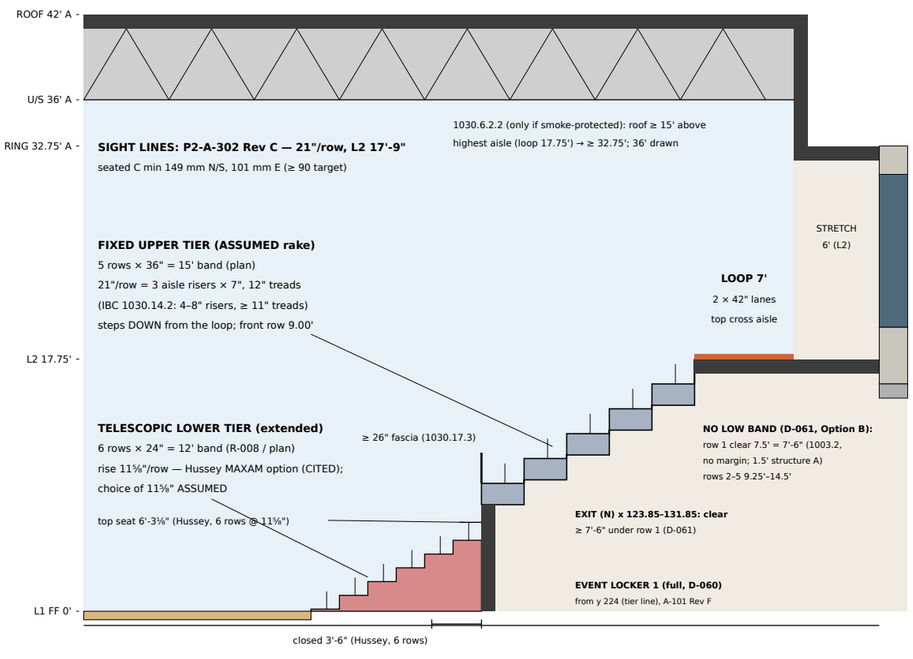


3 NORTH BOWL EDGE (ENLARGED PART OF A-A)

3/32" = 1'-0" · y 196–252 at x = 100

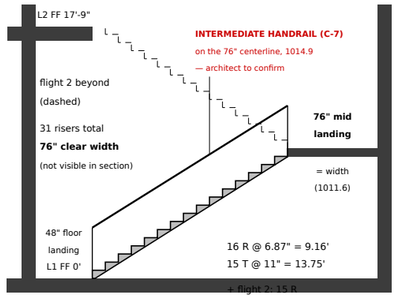

4 TYPICAL EXIT STAIR — 76" CLEAR, 31 R

3/32" = 1'-0" · 76" mid landing · 12.67' × 24.08' plan (D-061)

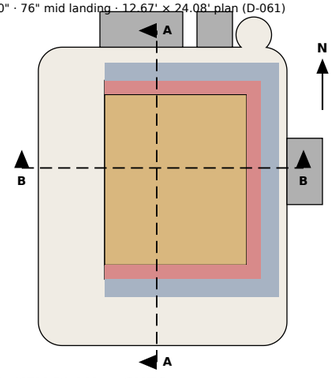

5 KEY PLAN — CUTS

1" = 128' · north up

CUT: slab / wall / roof (graphic)
TELESCOPIC LOWER TIER
LOBBY
SRM: BOARD-FORMED CONCRETE BAND (A)
ARENA VOLUME
FIXED UPPER TIER
ROOMS / SUPPORT
SRM: GLASS BAND (skin strip graphic)
EVENT FLOOR
LOOP (L2)
LONG-SPAN STRUCTURE ZONE
IMP POP-OUT (A)

HEIGHTS USED (ft above L1 FF 0'-0")

- L2 FF 17'-9" (D-061). Ring roof 32.75', arena U/S 36', roof 42' — ASSUMED. Bay / annex / bump-out 16' A (SK-01). Drum flush A (SK-02).
- Arena clear ≥ 25' — REFERENCE (NFHS court specs via Draper; LA RAP gym standard; R-019), not a code minimum (C-5). 36' drawn = 11' over it.
- Slabs, walls, roof graphic only. Upper-tier deck structure 1.5' under each tread — ASSUMED.

SEATING (P2-A-101 Rev F)

- Lower: telescopic, 6 rows × 24", 11⅝" rise (Hussey MAXAM option, CITED; choice ASSUMED); east front 16' from the nearest mat (D-053); building 210' wide.
- Upper: fixed, 15' band, 5 rows × 36", 21"/row (D-061) = 3 aisle risers × 7", 12" treads (1030.14.2: 4–8", ≥ 11"); steps DOWN from the loop (D-049) to a 9.0' front row.
- UNDER THE UPPER TIER: row 1 clear 7.5' = 7'-6" (1003.2 minimum, no margin), rows 2–5 9.25'–14.5'. No low band: EXIT (N), EXIT (E), SE concourse, lobby / portal / athlete route are clear. Event lockers run to the tier line (3,600 SF, D-060).
- SIGHT LINES: P2-A-302 Rev C (21"/row, L2 17'-9"): seated C min 149 mm N/S, 101 mm E; standing 127 / 72 mm (lower tier governs).

GUARDS

- Loop open edges G-W (x = 56) and G-S (y = 34): 42" (IBC 2021 1015.2 / 1015.3). Upper-tier front fascia ≥ 26" (1030.17.3), 36" at aisle feet (1030.17.4).

STAIRS (ST-1..ST-4)

- 76" clear (D-052). 31 R @ 6.87" (213" ÷ 31, ≤ 7", 1011.5.2), flights 16 + 15, 15 treads × 11" = 13.75'; 76" intermediate landing = width (1011.6, D-051); 48" floor landings. Per stair 12.67' × 24.08' = 305.1 SF per level (Rev C 270.2).
- Intermediate handrail on the centerline of each 76" stair so all width is within 30" of a rail (IBC 2021 1014.9; D-052 'with intermediate handrails') — shown in detail 4; architect to confirm (C-7).

ROOF HEIGHT (1030.6.2.2, if smoke-protected)

- Lowest roof deck ≥ 15' above the highest aisle: loop 17.75' → ≥ 32.75'. Arena U/S structure 36' drawn = 3.25' margin (deck higher). Ring roof 32.75' is over the perimeter rooms, not the seating.

ELEVATOR


- EL-1 travel 17'-9" (was 15'); hoistway / pit / overrun by the elevator supplier (not drawn).

CURRENT DESIGN (REV E)

- Outline = P2-A-101 Rev N / A-102 Rev I: R 20' corners, 30' ST-2 drum (beyond on B-B), annex on A-A, core-2 bump-out on B-B (D-072 / D-084). No bus loop (D-087).
- SRM skin (A-201 Rev L, D-074): cut exterior walls = concrete slab-edge bands + glass bands; colonnade (D-090: 2 + 2, entry axis open; the cut is in the 45.5' centre bay, column beyond) + 12' canopy on A-A. Levels, spacing ASSUMED. East wall flush with the arena: concrete, no glass (open).
- CUTS: A-A x = 100 looking west; B-B y = 150 looking north; 1" = 40'. Tiers as Rev D (unchanged). 'A' = ASSUMED.


PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**BUILDING SECTIONS SCHEMATIC · COLOR**	**AS NOTED**	**October 2026**	**F**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-301**

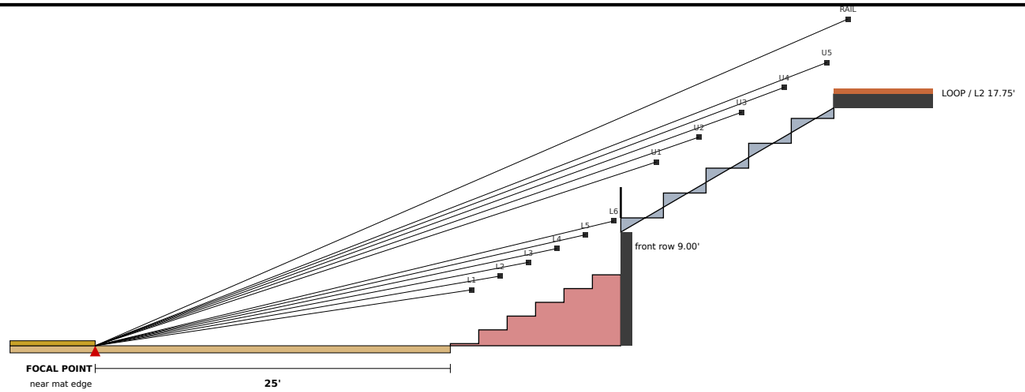


1 AS DRAWN (REV F) — NORTH / SOUTH SIDE (seated eyes)

3/32" = 1'-0" · focal 25' (10' clear + 15' table zone) · telescopic 11⅜" · upper 21"/row, L2 17'-9", front 9.0'

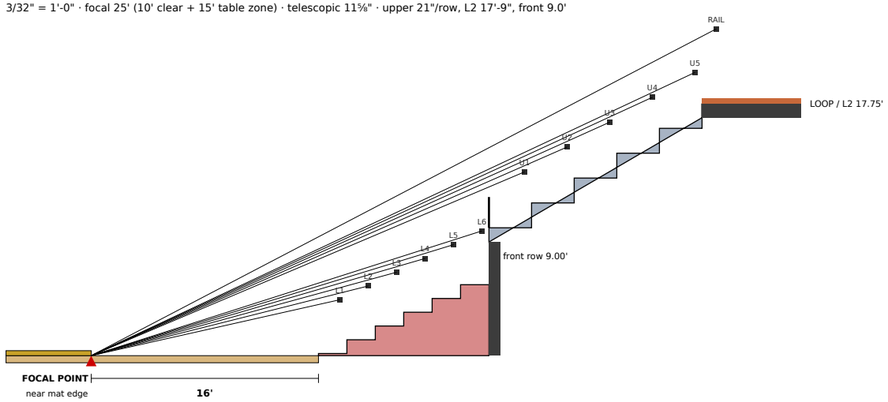

2 AS DRAWN (REV F) — EAST SIDE (seated eyes)

3/32" = 1'-0" · focal 16' (D-053) · upper 21"/row, L2 17'-9" · worst side

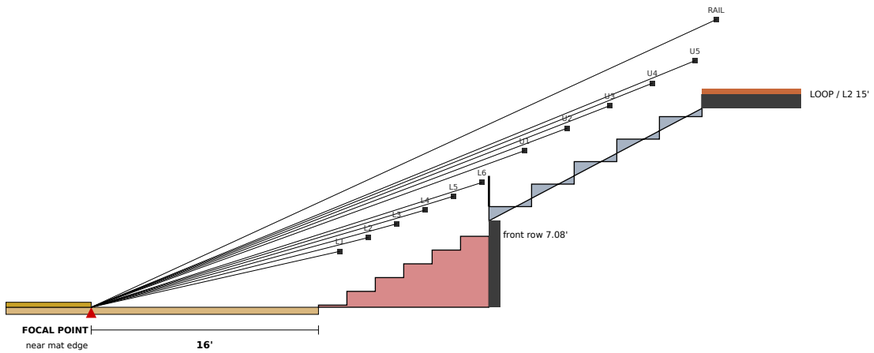

3 REV E BASIS (SUPERSEDED) — EAST SIDE (seated eyes)

3/32" = 1'-0" · focal 16' · L2 15' · upper 19"/row, front 7.08' · P2-A-302 Rev B 'as drawn'


SIGHTLINE GRADE (C, mm)

- ≥ 90 PASS
- 60–90 MARGINAL
- < 60 FAIL


Dots = eyes; label colour = C of that row over the row in front. Values: table.

4 TELESCOPIC STACK UNDER THE UPPER-TIER FRONT

3/16" = 1'-0" · recessed (Hussey) · N/S as drawn 9.0' · dashed = Rev E 7.08'

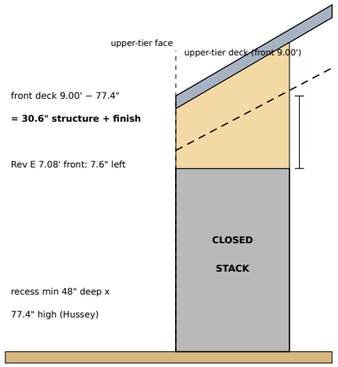

(a) CLOSED — fits only if structure ≤ 30.6" (as drawn)

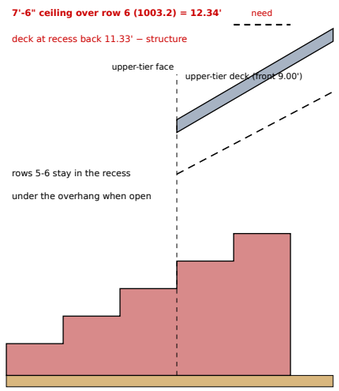

(b) OPEN — rows 5-6 under the overhang: CONFLICT

ROW	AS DRAWN (P2-A-101 Rev F / A-301 Rev D)				REV E BASIS (superseded)			
	N/S 25' seated	N/S 25' stand	E 16' seated	E 16' stand	N/S 25' seated	N/S 25' stand	E 16' seated	E 16' stand
L2	190	162	142	101	190	162	142	101
L3	178	152	129	92	178	152	129	92
L4	167	142	118	**84**	167	142	118	**84**
L5	157	134	109	**77**	157	134	109	**77**
L6	149	127	101	**72**	149	127	101	**72**
U1	967	937	879	840	428	397	352	313
U2	217	189	133	97	211	183	139	103
U3	203	177	122	**89**	198	171	127	94
U4	191	166	112	**82**	185	161	118	**87**
U5	179	156	105	**76**	175	151	109	**81**
RAIL (stands)	736	336	696	296	709	309	673	273
fascia clr (U1)	289	664	215	583	326	701	263	631
front row (ft)	9.00	9.00	9.00	9.00	7.08	7.08	7.08	7.08

METHOD

- C = D(N + R)/(D + T) − R (Green Guide 12.3), computed from each actual eye position (also covers the step between tiers and the loop rail). Focal point = near edge of the nearest mat at floor level (Shane). Eyes: seated 1.2 m above the tread, 0.15 m forward of the row's rear edge; standing 1.6 m (5'-3") — secondary sources, see R-020. Grades: ≥ 90 mm PASS (FIFA preferred, CEN/TR 15913 new stands), 60–90 MARGINAL, < 60 FAIL (FIFA minimum 60).
- Focal distances from P2-A-101 Rev F: N and S tier fronts 25' from the nearest mat (10' clear + 15' table zone); E tier front 16' (D-053). No west tier. Section-only study (2D); corners and wheelchair positions TBD.

RESULTS — AS DRAWN (REV F, D-061 DECIDED)

- L2 FF 17'-9", upper 21" per 36" row (3 aisle risers of 7", 12" treads; IBC 1030.14.2), front row 9.0'. Every seated row PASSES: N/S ≥ 149 mm, E ≥ 101 (lower tier governs, same as Rev E). Upper tier seated N/S ≥ 179, E ≥ 105.
- Standing: N/S ≥ 127; E ≥ 72 (L4–L6 and U3–U5 MARGINAL, none FAIL). U1 clears the 26" fascia (289 mm N/S, 215 E seated).

REV E BASIS (SUPERSEDED, P2-A-302 Rev B 'as drawn')

- L2 15', 19"/row, front 7.08': same lower-tier minimums; upper seated N/S ≥ 175, E ≥ 109; standing E ≥ 81. Kept for comparison only.

TELESCOPIC STACK UNDER THE UPPER-TIER FRONT (D-049)

- Closed stack, recessed (Hussey min 4'-0" deep x 6'-5⅜" high) under the 9.0' front leaves 30.6" for structure + finish (1.5' = 18" ASSUMED) — FITS closed. Open: rows 5–6 still sit under the overhang (< 7'-6", 1003.2): keep the stack in front of the upper-tier face (as P2-A-301 Rev D).

EXIT PATHS (D-061 DECIDED, Option B)


- 1.5' tier structure (ASSUMED) leaves 7'-6" under row 1 (1003.2 minimum, no margin) and 9.25'+ under rows 2–5: no low band; Exit N, Exit E, SE concourse and the lobby / portal / athlete-route edge are clear. 0 seats lost.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**SIGHT-LINE STUDY** **SCHEMATIC · COLOR**	**AS NOTED**	**October 2026**	**C**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-302**


EVENT LOCKER ROOM 1 — 900 SF · 18 occ.

1/8" = 1'-0" · door on the E wall → EXIT (N) passage · common path 46 ft ≤ 75 (PASS)

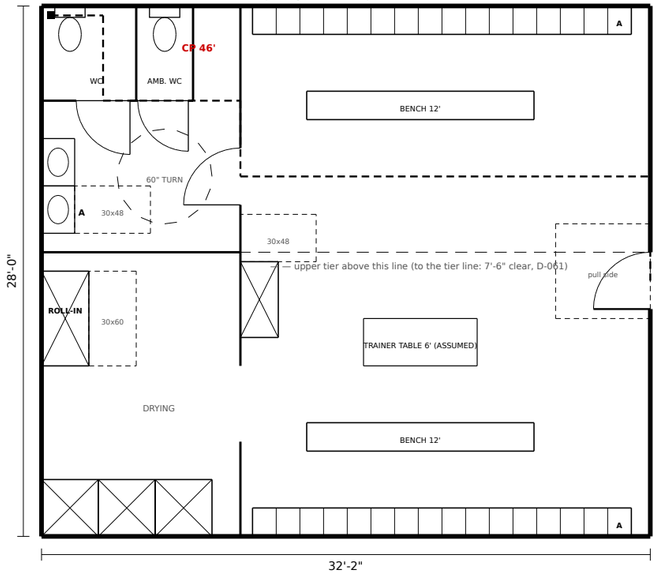


EVENT LOCKER ROOM 2 — 900 SF · 18 occ.

1/8" = 1'-0" · door on the W wall → EXIT (N) passage · common path 46 ft ≤ 75 (PASS)

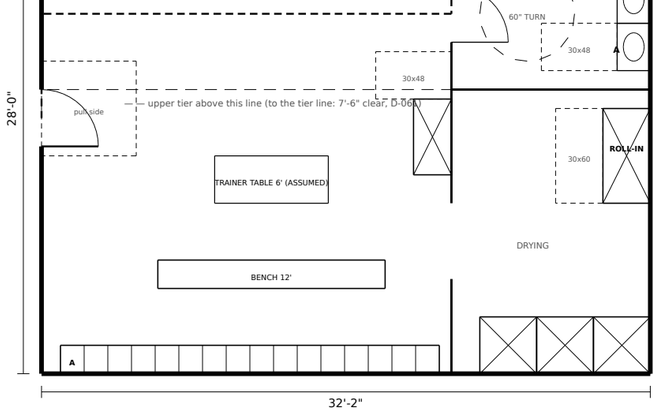


EVENT LOCKER ROOM 3 — 900 SF · 18 occ.

1/8" = 1'-0" · door on the S wall → EXIT (E) passage · common path 51 ft ≤ 75 (PASS)

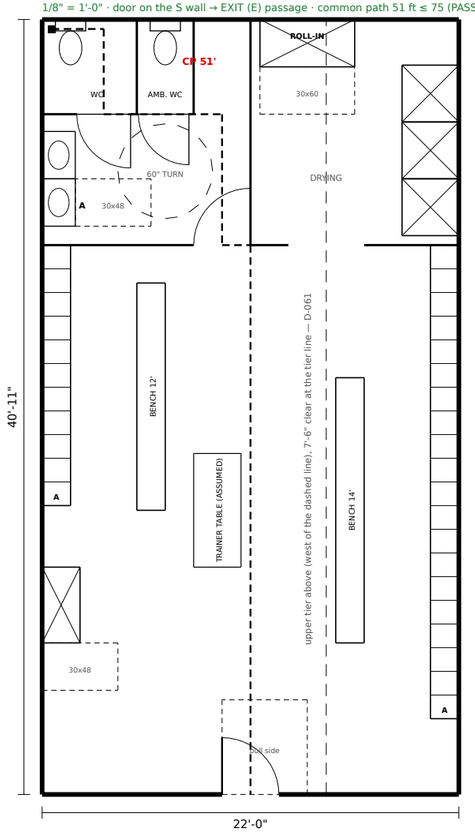


EVENT LOCKER ROOM 4 — 900 SF · 18 occ.

1/8" = 1'-0" · door on the N wall → EXIT (E) passage · common path 51 ft ≤ 75 (PASS)

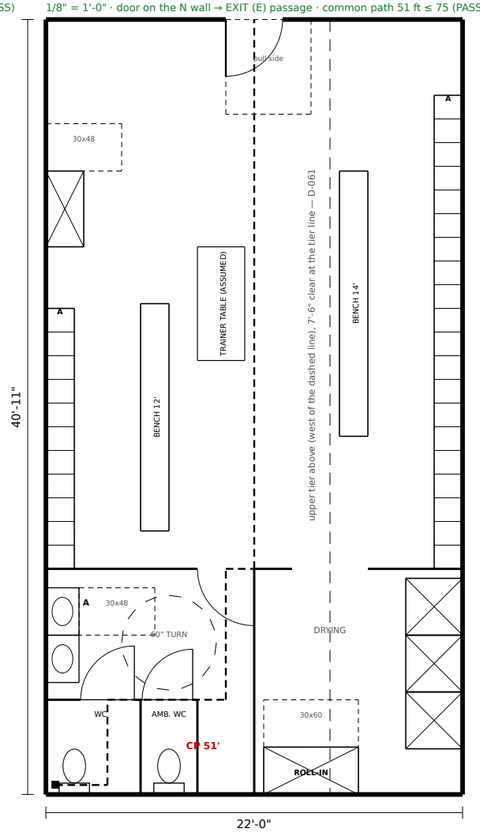

KEY PLAN — L1 (A-101 N)

1" = 250' · grey = rooms 1-4



blue = restrooms · green = public corridor (E)

CORE 2 AREA (SF)	DRAWN	TEST-FIT NET	WALLS / CHASE
Women (2), 30 x 34 (bump-out)	1,020	957	+6.6 %
Mech (E2), 30 x 22 (bump-out)	660		
BUMP-OUT 30 x 56 (A-101 J)	**1,680**		
Men (2), 14 x 26 (strip)	364	331.5	+9.8 %
DF alcove + janitor, 14 x 4	56		
Public corridor (E), 8 x 78.18	625		
Mech (E), 14 x 48.18	674.5		was 1,720
OLD MECH (E) STRIP 22 x 78.18	**1,720**		**GSF ±0**

WHY THE CORRIDOR (D-072): on plan Rev I the public reached core 2 only through V2 / EXIT (E) — across the event floor, with restroom queues in the exit passage. Rev J slides the bump-out 42 ft south (entirely south of EXIT (E)) and adds an 8 ft public corridor from Concourse (E), behind the tier line: restroom doors open only onto it, EXIT (E) stays clear, and X11 gives the corridor its own exit (common path 61 ft <= 75).

MEP (OPEN): Mech (E) 1,720 -> 674.5 SF + MECH (E2) 660 SF; total mech ≈ 3,496 SF = 4.1 % of 85,793 GSF vs 5 % planning (R-014). Engineer to confirm; the storage annex (north) can absorb more later. Plumbing: men's (strip) and women's (bump-out) wet walls meet across the corridor; waste / vent under slab (ASSUMED).

Public toilets within one storey and 500 ft of every seat (IBC 2902.3.3): PASS. Dead end past the last door ≈ 5 ft ≤ 20 ft (1020.5).

Sources: params/phase2_enlarged.yaml, phase2_enlarged_rev_d.yaml, phase2_plan_rev_j.yaml, phase2_program.yaml (rev_k); IBC 2021 T2902.1, 2902.3.3, 1003.6, 1006.2.1, 1020.5, T1017.2; IPC 2021 405.3.1, 405.3.5, 424.2; ADA 2010 211.2, 213.3, 304.3, 602, 604.8, 605, 606; D-064, D-068, D-069, D-070, D-072; R-014; Shane 2026-10-04 evening.

Schematic enlarged plans: fixture counts, benches, lockers and showers ASSUMED (KEYSTONE). Accessible fixture sizes are ADA 2010 minimums for the architect to develop; not a code review (D-008).

COMMON PATH — VERIFIED ON THIS LAYOUT (T1006.2.1)

One exit access doorway allowed when the space holds <= 49 occupants and the common path of egress travel is <= 75 ft (Group A, sprinklered) — IBC 2021 1006.2.1, Table 1006.2.1.

ROOM	OCC.	WORST POINT	CP ft	RESULT	+ TO EXIT
1	18	accessible WC far corner	45.6	≤ 75 PASS	X5 64 ft
2	18	accessible WC far corner	45.6	≤ 75 PASS	X5 64 ft
3	18	accessible WC far corner	50.9	≤ 75 PASS	X7 66 ft
4	18	accessible WC far corner	50.9	≤ 75 PASS	X7 66 ft

Rooms 1-4 unchanged (Rev A approved, D-068). Rooms 3-4 reach X7 on the building wall again (EXIT (E) clear, D-072): travel ≤ 66 ft vs 250 ft (T1017.2). Locker fixtures as Rev A (ADA 604.8, 606, 608, 803, 811, 903).

L1 PUBLIC RESTROOMS — CHAIRS-ONLY (D-064 · D-069 · D-072)


L1 load chairs-only 2,346 + 1,100 = 3,446 (IBC 2021 T2902.1, 50/50 split 2902.1.1). Lobby core = rooms 4 + 5; core 2 = women (2) in the bump-out + men (2) and DF in the old Mech (E) strip, all off the public corridor (E).

FIXTURE	REQ.	LOBBY	CORE 2	TOTAL	RESULT
Men WC (incl. urinals)	22	10	5 + 7 ur	22	PASS
Men lavatories	9	4	5	9	PASS
Women WC	42	18	24	42	PASS
Women lavatories	12	5	7	12	PASS
Drinking fountains	4	2	2 (hi-lo)	4	PASS

Urinals: core 2 7 ≤ 8 = 67 % of its 12 (IPC 2021 424.2, R-009). 1 accessible urinal (ADA 213.3.3, 605); 1 wheelchair + 1 ambulatory compartment per room (213.3.1, 604.8); 1 accessible lav (606); 60 in turning space (304.3); hi-lo fountains (211.2, 602).

RESTROOM CORE 2 + PUBLIC CORRIDOR (E) — D-072 · ENLARGED PLAN

1" = 22'-0" · plan turned: north → right, east → down · test-fits ASSUMED

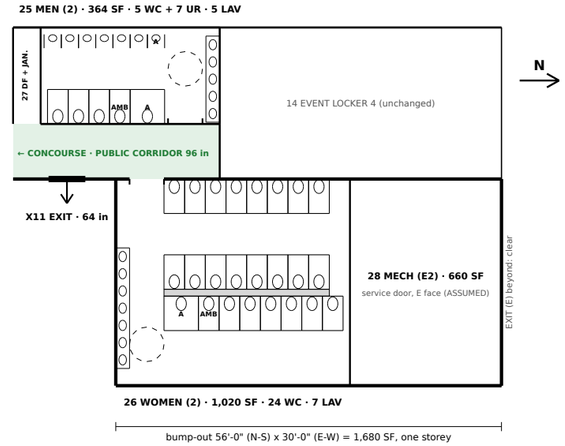


A = accessible · AMB = ambulatory · dashed circle = 60 in turning space · grey = chase · ticks = room entry

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**ENLARGED PLANS LOCKER RMS + RESTROOM CORE 2**	**AS NOTED**	**October 2026**	**E**	Drawn by Claude (AI) for Shane Brazelton	**P2-A-401**


V1 AERIAL FROM SOUTHWEST

axonometric · not to scale

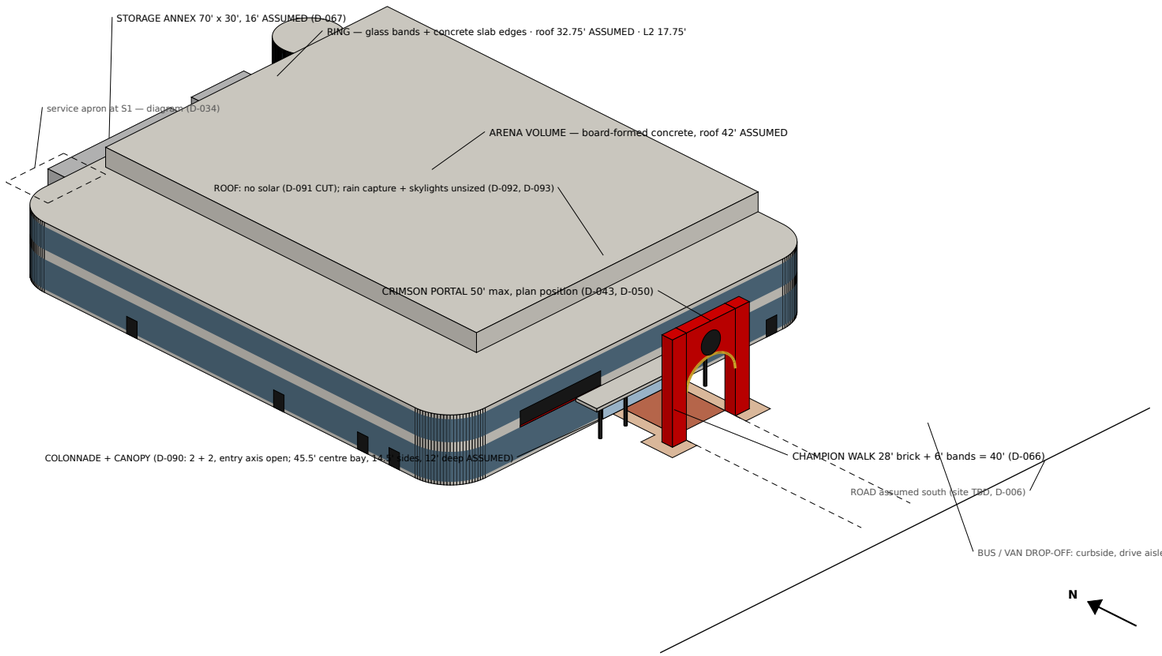


V3 AERIAL FROM SOUTHEAST

axonometric · not to scale

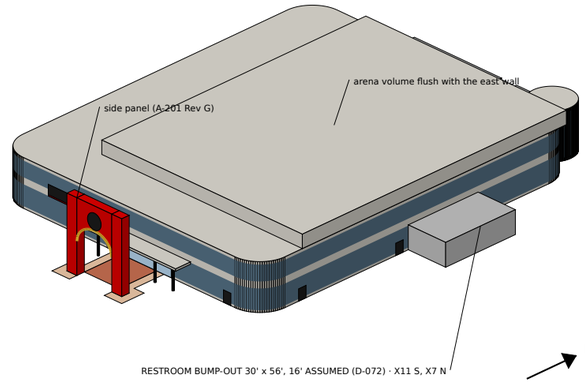


V5 PORTAL + CHAMPION WALK FROM SOUTH-SOUTHWEST

axonometric · not to scale

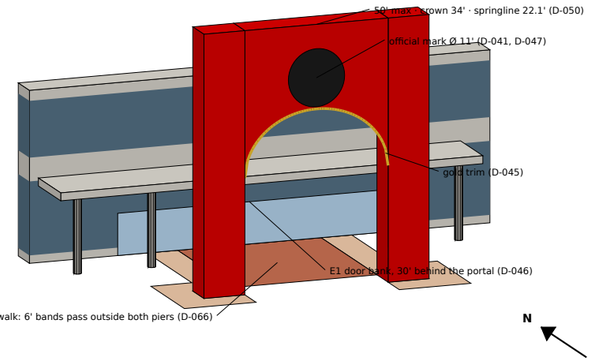


V4 AERIAL FROM NORTHWEST (SERVICE SIDE, S1)

axonometric · not to scale

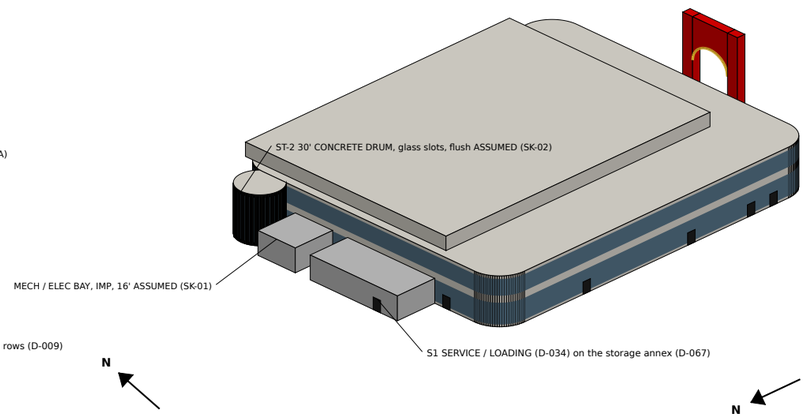

V2 CUTAWAY AT L2 FF 17'-9" FROM SOUTHWEST — ROOFS REMOVED

axonometric · not to scale · roofs removed, L1 ring cut solid at L2 FF

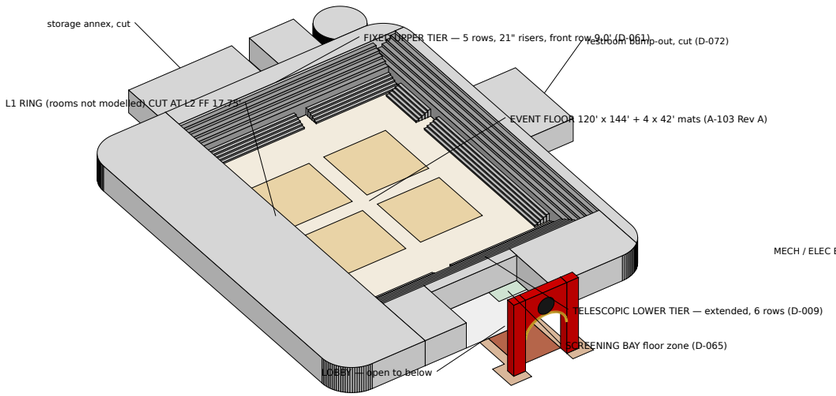

MASSING ONLY. Volumes from the current schematic params; materials, openings, parapets, roof equipment and structure are not designed. Every height not marked DECIDED is ASSUMED (P2-A-201 Rev G). Not a rendering of a final design.

HEIGHTS MODELLED

L2 FF 17.75' DECIDED (D-061) · ring roof 32.75' ASSUMED · arena roof 42' ASSUMED (P2-A-201 Rev G) · portal 50' max, crown 34', springline 22.1' (D-050) · tiers per P2-A-301 Rev D / A-302 Rev C. Door symbols 6' x 8' ASSUMED.

DECISIONS MODELLED — 2026-10-04 .. 2026-10-14 (D-072 .. D-093)

- D-054 .. D-087 DECIDED: building, annex, bump-out, drum, bay, walk and bus-loop cut as Rev F (chairs-only floor, 40 ft walk, R 20 corners).
- D-074 DECIDED: SRM HQ look: concrete slab-edge bands + glass per level, curved corners, drum with glass slots, colonnade + canopy (D-090: 2 + 2 columns, entry axis open), crimson portal (ASSUMED).
- SK: bay 16 ft and drum flush ASSUMED (SK-01 / SK-02 pending); column spacing 14.5 ft, canopy 12 ft, band levels ASSUMED.

NOTES

- NOT MODELLED: parapets (TBD), rooftop units, structure, windows / cladding, grading, landscaping, lighting, parking (site TBD, D-006), signage content (signage zone TBD), interior rooms.
- SRM HQ look (D-074, Shane 2026-10-11): light-gray board-formed concrete (hex ASSUMED, no concrete gray in the scripts), continuous glass bands per level (ASSUMED levels), IMP on the one-storey pop-outs, crimson #CC0000 portal; gold trim / brick from A-201 Rev G. Walk + portal at the PLAN position (not the concept image). No new program; GSF 86,964 unchanged.
- D-091 solar CUT (no zones). D-092 roof rain capture for field irrigation, cistern TBD with civil. D-093 LED throughout + daylighting (glass bands, skylights where code allows; IECC 2015 C402.4.2 trigger). All unsized, none modelled.
- Model file: phase2/out/3d/P2-A-901_RevI_massing.obj + .mtl (feet, Y-up export; exterior, cutaway and portal sets).


Sources: phase2_massing.yaml + _rev_g.yaml, phase2_facade_srm.yaml, phase2_plan_rev_j.yaml, p2_plan_rev_n_geom.py, phase2_elev_rev_g.yaml, phase2_site_rev_h.yaml; Shane 2026-10-11 2:57 PM CT.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION


PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)	**PHASE 2**	**3D MASSING MODEL VIEWS**	**NTS**	**October 2026**	**I**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-A-901**

How tall should the mech / elec bay be?

Red = the thing to decide. Gray = everything else, as drawn (A-201 Rev K / A-901 Rev F). Pick (a), (b) or (c) below.

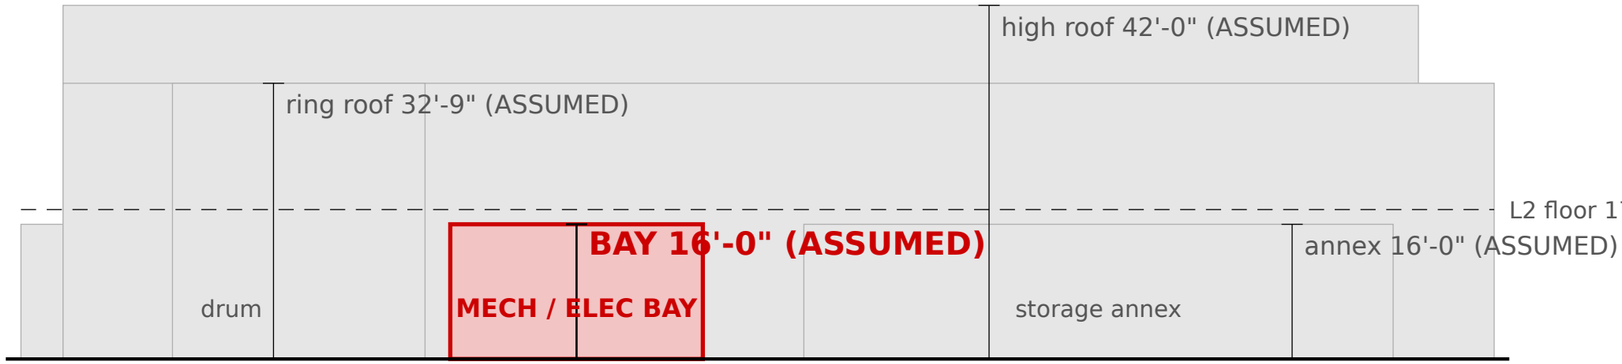

NORTH ELEVATION, CLOSE-UP (east on the left) · not to scale

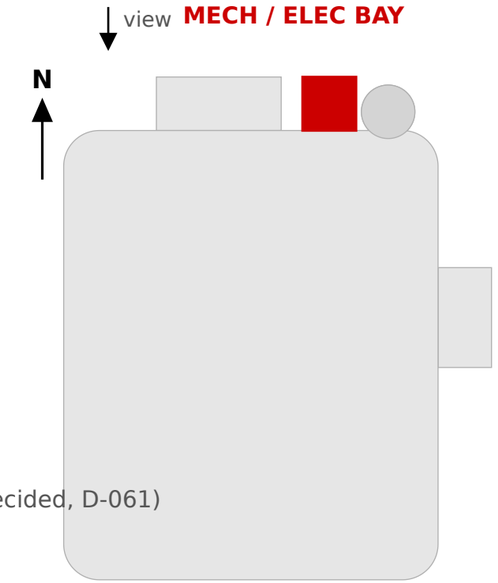


KEY PLAN (P2-A-101 Rev N) · not to scale

looking south at the north side

WHAT'S FIXED / WHAT'S ASSUMED


- L2 floor 17'-9": decided (D-061).
- Ring roof 32'-9", high roof 42'-0": ASSUMED.
- Annex 16'-0": ASSUMED (one storey, D-067).
- Bay 30' x 30' (D-081); height ASSUMED, no MEP input yet.
- Heights in the choices are examples, ASSUMED.

CHOICES

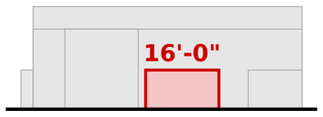


(a) 16 ft, as drawn

Matches the annex. Least wall, lowest cost. Own low roof drains on its own.

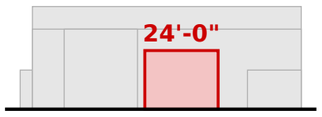

(b) 24 ft, taller (ASSUMED)

Only if MEP equipment needs it (TBD). More wall and cost. Still a low roof.

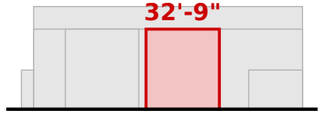

(c) 32.75 ft, flush with ring


Most wall and cost. Reads as part of the ring. Roof drains with the ring roof (TBD).

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION


PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**STUDY: MECH / ELEC BAY HEIGHT (to decide)**	**NTS**	**October 2026**	**STUDY**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-SK-01**

How tall should the NE stair drum be?

Red = the thing to decide. Gray = everything else, as drawn (A-201 Rev K / A-901 Rev F). Pick (a), (b) or (c) below.

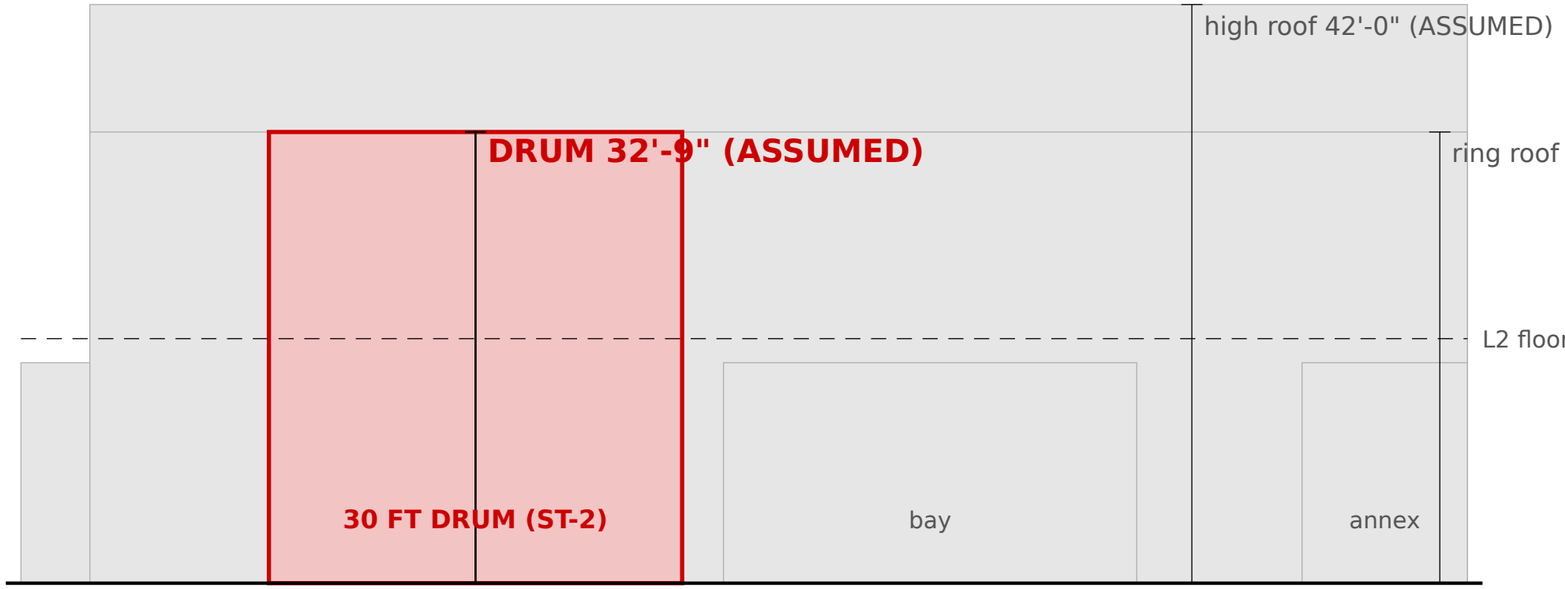


NORTH ELEVATION, CLOSE-UP (east on the left) · not to scale

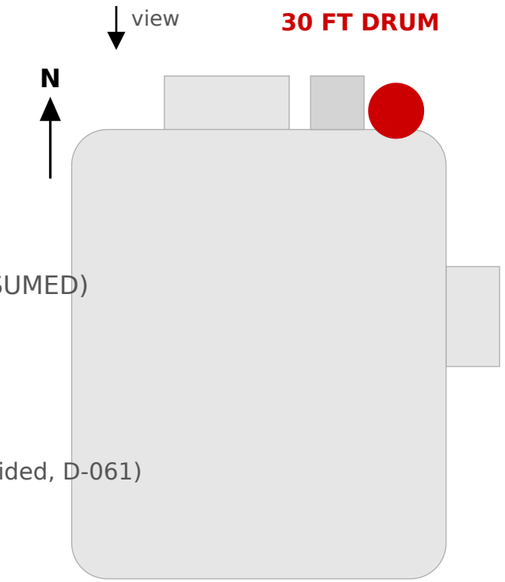

KEY PLAN (P2-A-101 Rev N) · not to scale


looking south at the north side

CHOICES

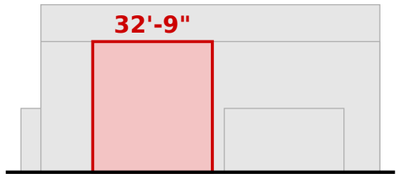


(a) flush with ring roof, as drawn

Quiet; drum reads as a curve on the corner only.

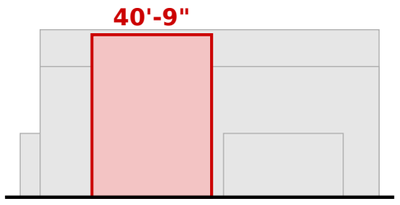

(b) tower, +8 ft (ASSUMED)

Corner marker in the SRM HQ style (D-074). More wall, cost, flashing.

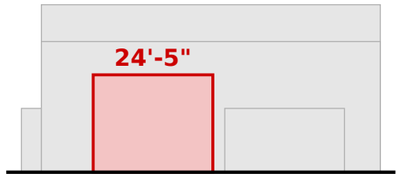

(c) stop at the stair (24.4 ft)

L2 17.75 + 80 in headroom (IBC 2021 1011.3) + roof TBD. Only if no stair to the roof.

WHAT'S FIXED / WHAT'S ASSUMED

- L2 floor 17'-9": decided (D-061).
- Ring roof 32'-9", high roof 42'-0": ASSUMED.
- Annex 16'-0": ASSUMED (one storey, D-067).
- Drum 30 ft across (D-082); height ASSUMED.
- Stair to the roof: IBC 2021 1011.12 requires it only for 4 or more stories above grade plane. This building has 2, so not by that section (verify with the AHJ, D-008). Rooftop equipment access: IMC 2021 306.5 (a permanent ladder may serve). TBD.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**STUDY: NE DRUM HEIGHT (to decide)**	**NTS**	**October 2026**	**STUDY**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P2-SK-02**