

(a) WRESTLING — 4 x 42' MATS, 2 x 2

1" = 50'-0" · tier open · NFHS clearances all PASS (table at right)

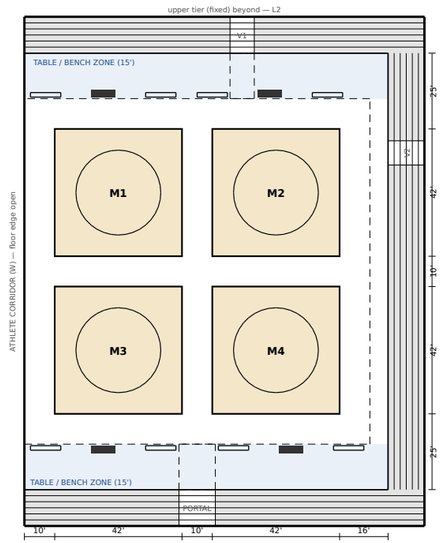


(b) BASKETBALL — 1 COURT (IN PARAMS)

1" = 50'-0" · tier open · mats up, court down, seats stay

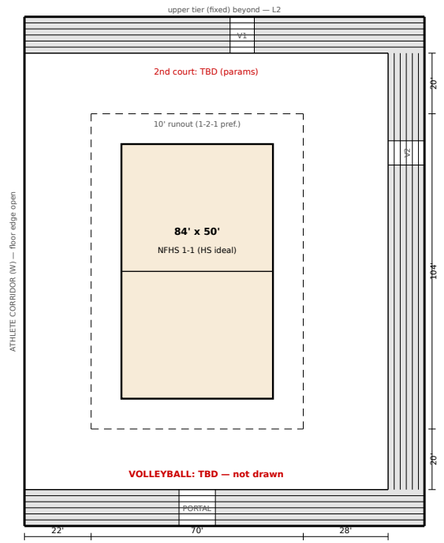


(c) TELESCOPIC LOWER TIER — OPEN vs CLOSED

1" = 50'-0" · 6 rows x 24 in = 12' open; 3'-6" closed (Hussey)

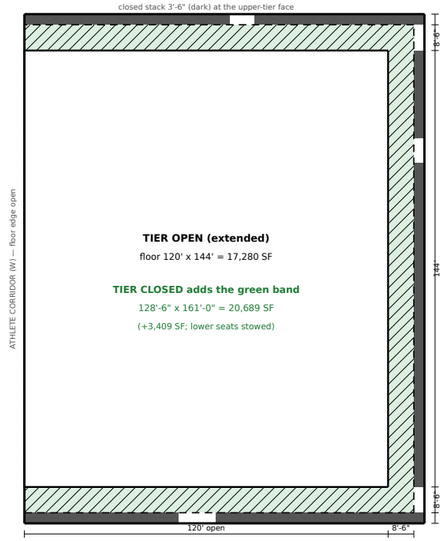

(d) EVENT-FLOOR CASES — P2-G-002 Rev G

1" = 100'-0" · 16,416 SF · chairs = design (D-054) · 8' V2 egress aisle kept (D-072)

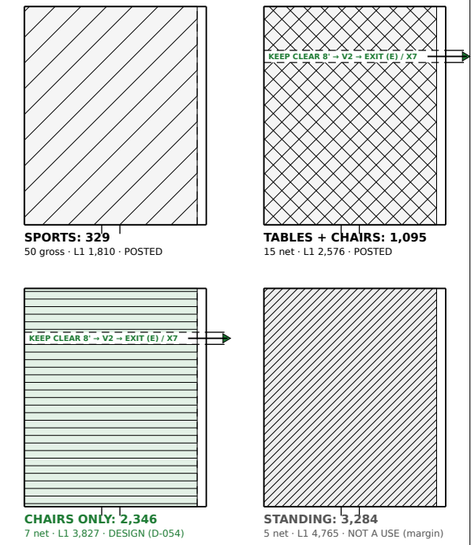

(a) WRESTLING — NFHS CLEARANCES ON THIS LAYOUT

RULE	ITEM	REQUIRED	DRAWN	
NFHS 2-1-2	Circle + safety area	>= 28 + 2 x 5 = 38 ft	42 ft mat (7 ft each side of a 28 ft circle)	PASS
NFHS 2-1-5	Space around each mat	>= 10 ft	W 10 · between 10 / 10 · E 16 · S / N 25 / 25	PASS
NFHS 2-3	Scorer's table to mat	>= 10 ft	10.5 ft	PASS
NFHS 2-1-5	Bench to mat / to table	>= 10 / >= 10 ft	10.5 / 10 ft	PASS
KHSAA (rec.)	Circle to walls / tier	about 10 ft	W 17 (open to corridor) · E 23 · S / N 32 / 32	PASS

Tables 8' x 2.5' and benches 10' x 1.5' ASSUMED (no size in NFHS text found), front edge 10.5' from the mat. Portal and V1 aisles kept clear (egress, P2-A-111). Tournaments: up to two team personnel in chairs at the mat edge (NFHS 2-2-2); dual meets can use one mat (R-005.5). Rule text: NFHS 2014-15 (R-005); current book UNVERIFIED. 28' circle drawn = NFHS minimum (42' mats are often sold with a 32' circle).

(b) BASKETBALL / VOLLEYBALL — FROM PARAMS ONLY

1 court (phase2.yaml basketball_full_courts: 1): 84' x 50' (NFHS 1-1) + 10' runout (1-2-1: >= 3', 10' preferred) = 70' x 104'; to the floor edge W 22' / E 28' / S 20' / N 20'. Clear height >= 25' (R-019). Boundary + division line only (other markings not drawn: not researched); team benches / scorer's table for basketball: TBD (not in params or decisions).

VOLLEYBALL: TBD — phase2.yaml volleyball_courts: TBD; R-012 volleyball not researched. Nothing drawn (no new program). 2nd basketball court: TBD (phase2.yaml basketball_second_court: TBD; 'only after clear span is measured').

(c) TELESCOPIC LOWER TIER — FLOOR ZONES

STATE	FLOOR ZONE	SF	LOWER SEATS
Open — extended 12' (6 x 24 in)	120' x 144'	17,280	1,100
Closed — 3'-6" stack	128'-6" x 161'-0"	20,689	0
Gain (N, S, E)	+8'-6" each side	+3,409	


Stack closes against the upper-tier face line (N y = 224, S y = 56, E x = 188): P2-A-302 Rev C keeps the stack in front of the upper-tier face, not recessed (open rows 5-6 would sit under < 7'-6"). Each side (N, S, E) operates on its own (ASSUMED; banks and motorization TBD, manufacturer). Folding and telescopic seating that is not a building element: ICC 300 (IBC 2021 1030.1.1). Spaces under bleachers: 1-hour separation unless an exception applies (1030.1.1.1) — architect. Portal, V1, V2 stay open through the stack.

CONVERSIONS + STORAGE (ASSUMED SEQUENCE)

- Wrestling: tier open; mats roll in from EQUIP. STORAGE at the top of the athlete corridor (plan Rev J, unchanged).
- Basketball: mats up and stored, court surface down (surface type TBD); seats stay (phase2.yaml floor_converts).
- Floor events: chairs, tables and stage carts come from the new Chair / Table / Stage Storage annex (2,100 SF, D-067) — route below. Tier open or closed per event. Every chair layout keeps the 8' V2 aisle open for egress (floor → V2 → EXIT (E) → X7). Restrooms: portal → Concourse (E) → public corridor → core 2 (D-072).
- Post the occupant load for each configuration near the main exit (IBC 2021 1004.9): sports, tables, chairs (design). Standing is not posted.

STORAGE → FLOOR

D-067 · 1" = 150' · route ASSUMED

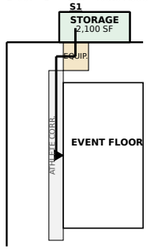

Chairs / tables / stage carts: annex → EQUIP. STORAGE → athlete corridor → floor (west edge open); deliveries via S1 on the annex north wall (D-034). Route ASSUMED; door sizes for 67 x 33.25 in trucks: architect.

Annex 70' x 30', one storey, north wall between X4 and X5; S1 moved to its north wall (y 282). Sized for 56 chair / table trucks (42 chairs + 8-10 tables each) + stage carts (D-067, aisle factor ASSUMED).

Screening bay (D-065) is in the lobby, outside these views: P2-A-101 Rev N / P2-A-111 Rev F.

Schematic overlays for the owner, the architect of record and the AHJ. Not a code review and no statement of approval (D-008). Sports rules quoted from older NFHS editions (current books paywalled): UNVERIFIED against the current edition. Furniture positions ASSUMED.

(d) EVENT-FLOOR CASES — POSTED LOADS (1004.9)

CASE	FACTOR	FLOOR	L1	LAYOUT NOTE
Sports	50 gross	329	1,810	POST the sports load. Mats (a) or court (b); tier open. Exercise 50 gross ASSUMED (AHJ assigns).
Tables + Chairs	15 net	1,095	2,576	POST. Keep the 8 ft V2 egress aisle clear. Aisles measured 19 in from the table edge (1030.13.1); level aisles 42 / 36 in (1030.9.1). Layout TBD.
Chairs Only	**7 net**	**2,346**	**3,827**	**POST — DESIGN CASE (D-054). Keep the 8 ft V2 egress aisle clear. Rows: >= 12 in clear up to 14 seats, + 0.3 in per seat beyond, <= 100 per row, aisles both ends (1030.13.2).**
Standing	5 net	3,284	4,765	NOT A USE: no standing-floor events (D-054). Kept only as exit margin: L1 exits stay as drawn (E1 467.0 in vs 468 in clear).

Floor = 16,416 SF (G-002 Rev G, 114' x 144'; the east 6' strip, D-053, unhatched); L1 = floor + 1,100 lower seats + 381 other L1 rooms (incl. the storage annex, 300 gross). Design case = chairs: L1 3,827. Tier CLOSED, chairs: 2,956 on 20,689 SF with no lower seats → L1 3,337, below the design case; restroom load 2,956 < 3,446 (net = gross ASSUMED). Whole drawn zone standing (17,280 SF = 3,456) would need E1 479.9 in vs 468 in clear beside the screening bay: not permitted (standing is not a use).

CHAIR LAYOUTS — V2 EGRESS AISLE (D-072)

8 ft (96 in) EGRESS cross-aisle on the V2 line (y 175.09-183.09), full floor width: west edge (athlete corridor, open) -> east 6 ft strip -> V2 -> EXIT (E) -> X7 (clear, D-072). Restroom traffic goes out the portal to Concourse (E) and the public corridor, not this way. Width = V2 / EXIT (E) width (ASSUMED); >= 36 / 42 in level-aisle minimum (IBC 2021 1030.9.1). Lies inside the 16,416 SF floor: posted loads unchanged (net floor area basis ASSUMED, AHJ). No chairs, tables or stage in it.

DECISIONS — SHANE 1:21 / 1:22 / 3:31 PM CT + D-070 / D-072

- D-054 DECIDED: chairs-only floor (7 net -> 2,346) is the design case; exits stay as drawn for standing (margin).
- D-064 DECIDED: restrooms sized to chairs-only; posted loads; temporary units above that.
- D-065 DECIDED: screening in a side bay of the lobby, 468 in clear kept beside it (P2-A-101 Rev N, P2-A-111 Rev F; outside these views).
- D-066 DECIDED: 40 ft walk at the doors (28 ft brick + 6 ft bands), flows around both portal piers (P2-C-101 Rev E).
- D-067 DECIDED: 2,100 SF chair / table / stage storage annex at the north wall, S1 on it (route: STORAGE → FLOOR on this sheet).
- D-069 DECIDED: core 2 (second restroom pair) in a one-storey 30 x 56 ft bump-out now reached from Concourse (E) by the public corridor (P2-A-101 Rev N, P2-A-401 Rev E).
- D-070 DECIDED: core 2 stays on the EAST wall.
- D-072 DECIDED: public corridor (E) from Concourse (E) to core 2, bump-out 42 ft south of EXIT (E), X11; restroom traffic never crosses the floor — the V2 aisle stays for egress.

LEGEND

Grey band = telescopic lower tier open (thin lines = 24 in rows) · dark band = closed stack · tan = mat (circle = 28' NFHS minimum) · black bar = scorer's table · open bar = team bench · blue = table / bench zone · dashed = 10' mat area / keep-clear aisle / runout · green hatch = floor gained when closed · (d): green = design case, grey = not a use · route: green = storage annex, tan = equipment storage, line = cart route. (d): white band + arrow = 8' keep-clear aisle to V2.

Sources: params/phase2_overlays.yaml, phase2_overlays_rev_d.yaml; phase2_plan_rev_j.yaml; phase2_code_rev_d.yaml; R-005 (NFHS Wrestling 2-1-2, 2-1-5, 2-2-1, 2-2-2, 2-3; KHSAA); R-012; R-019; R-008 / Hussey MAXAM; R-007.2 (IBC 2021 T1004.5); IBC 2021 1004.9, 1030.1.1, 1030.9.1, 1030.13.1, 1030.13.2 (UpCodes, retrieved 2026-10-04); P2-G-002 Rev D / G; P2-A-101 Rev N; P2-A-111 Rev F; P2-A-401 Rev E; D-053, D-054, D-064 to D-072; Shane 2026-10-04 evening; 2026-10-11 7:19 PM CT.

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Trojan Horse Arena · Hazel Green area, Madison County, Alabama (site TBD, D-006)**	**PHASE 2**	**FLOOR OVERLAYS** **MATS, SEATING + CONVERSIONS**	**AS NOTED**	**October 2026**	**E**	Drawn by Claude (AI) for Shane Brazelton	**P2-A-103**