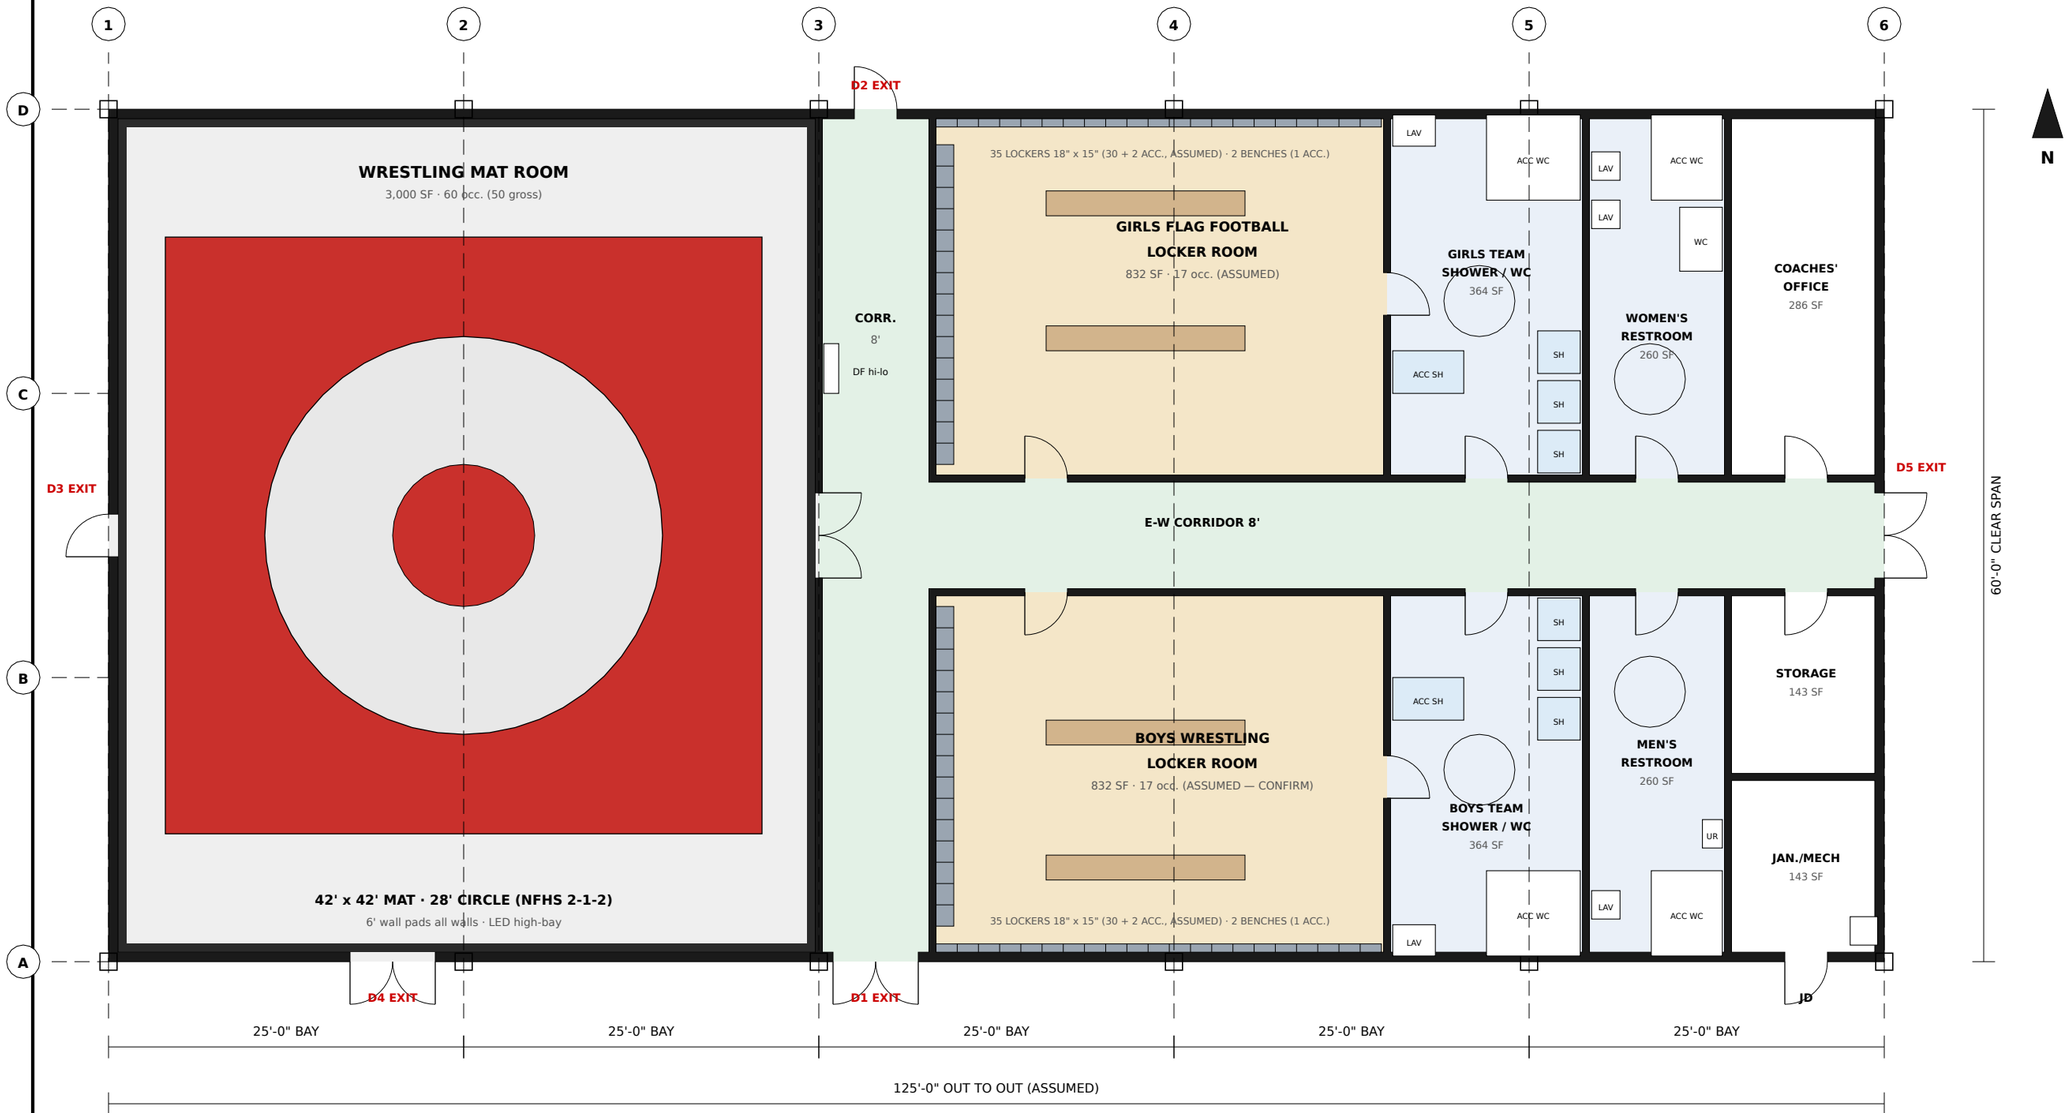

PLAN NOTES

- D-095 (Shane 2026-10-15 5:12 AM CT) supersedes the D-094 layout: restrooms open off the corridor; 2 locker rooms, each with its own showers.
- Grown one 25' bay: 60' x 100' -> 60' x 125' (ASSUMED). Mat room unchanged: 42' x 42' mat, 6' pads.
- North: girls' flag football locker room (ASSUMED). South: boys wrestling locker room (ASSUMED — CONFIRM: Shane wrote 'boys lockeroom and boys locker room for wrestling').
- Team shower / WC rooms: doors from the locker room AND the E-W corridor. Women's + men's restrooms open only off the corridor.
- Privacy vestibules / door hardware at the corridor doors TBD (architect).
- Exits (red): D1 main pair, D2 N, D3 W, D4 mat pair, D5 E corridor pair. Checks: P1-G-101.
- Wet walls TBD (CMU or moisture-resistant). Cost TBD per the Summertown Metals quote.

LEGEND

- wrestling mat
- 6' wall pads
- locker rooms
- showers / restrooms
- corridors
- lockers

FLOOR PLAN — NEW METAL TRAINING BUILDING (ALTERNATE) REV B

3/32" = 1'-0" · 125' x 60' = 7,500 SF clear-span PEMB, 5 x 25' bays (ASSUMED) · plan north up · D-095

PRELIMINARY — CONCEPTUAL DESIGN — NOT FOR CONSTRUCTION

PROJECT	PHASE	SHEET TITLE	SCALE	DATE	REV	DRAWN BY	SHEET
Hazel Green Regional Athletic Complex **Hazel Green HS · Phase 1 alternate: new metal training building**	**PHASE 1 ALTERNATE**	**FLOOR PLAN** **METAL BUILDING (ALT.)**	**3/32" = 1'-0"**	**October 2026**	**B**	Drawn by KEYSTONE (AI) for Shane Brazelton	**P1-A-201**